



PRODUCT CATALOG

WIDEST RANGE OF LED LIGHTING PRODUCTS

DECEMBER 2025



ABOUT US

Origin

Founded a decade ago, LITESUN began with a vision to revolutionize lighting through innovation and energy efficiency. From day one, our mission has been to enhance lives and environments with smart, sustainable lighting solutions.

Purpose

We believe lighting goes beyond illumination. It influences mood, productivity, and sustainability. That's why we're committed to offering eco-friendly LED products that reduce energy consumption and support a cleaner, greener planet.

Present

Today, LITESUN is a trusted name across North India, recognized for its reliability, quality, and service. With a strong network of 10,000+ retailers and the trust of millions, we continue to brighten homes, businesses, and communities.

Future

Looking forward, our focus stays rooted in innovation, design, and sustainability. We aim to develop smarter, more efficient, and aesthetically advanced lighting solutions that meet the evolving needs of our customers.

LITESUN FOUNDATION

We believe in giving back. Through the LITESUN Foundation, we support individuals and communities in need across various causes each year. Every time you choose LITESUN, a part of your purchase goes toward building a better tomorrow.

Sustainable Lighting

At LITESUN, we champion sustainable lighting through energy-efficient designs, long-lasting components, and eco-friendly manufacturing. Our solutions minimize environmental impact while enhancing comfort and performance—bringing harmony between innovation and nature for a brighter, greener future.



INDEX

PAGE
05-19



Architectural
Lighting Range

PAGE
20-47



Indoor
Lighting Range

PAGE
48-71



Outdoor
Lighting Range

PAGE
72-76



Electrical
Accessories
and appliances



Architectural Lighting Range

Discover our architectural lighting range. Designed to enhance spaces with precision, elegance, and functionality for modern interiors and exteriors.

Model No.
ANRHPL-40W

Wattage
40W

Color Temperature
6500K/4000K/3000K

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI **Beam Angle**
>80 110°


Body Type
High quality aluminium sheet metal based housing

Lumens
4000lms

Surge Protection
4KV

Dimensions {LXWXH}mm
1195X55X60

Body Color



White Black

Application Area



Office, Showroom, Café, Restaurants,
Hospitality, etc.

Profile Light

LED Linear Light

IP20



The extruded aluminium housing offers a precise in-line appearance. This LED fixture comes with excellent light distribution, high wired LED driver to be used in suspended / surface applications

Model No.

ANRPRLS-30W/55W/80W

Wattage

30W/55W/80W

Color Temperature

6500K/4000K/3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

110°

Body Type

High quality aluminium sheet metal based housing

Lumens

3000 lms(30W) / 5500 lms(55W) / 8000lms(80W)

Surge Protection

4KV

Dimensions {DiaXH}mm

(400/600/900)X50

Body Color



White

Black

Application Area



Office, Showroom, Café, Restaurants, Hospitality, etc.



Ring Light

LED Suspended Ring Light

IP20



The ring light Pendant features a striking circular ring design in aluminium, paired with a PC diffuser for smooth, radiant glow. Perfect for atriums, reception areas, showrooms, conference rooms and designer spaces where sculptural lighting meets function.

Model No.

ANRPDS-30W/45W/55W/80W

Wattage

30W/45W/60W/80W

Color Temperature

6500K/4000K/3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

110°

Body Type

High quality aluminium sheet metal based housing

Lumens

3000 lms(30W) / 4500 lms(45W) / 6000lms (60W) / 8000lms (80W)

Surge Protection

4KV

Dimensions {DiaXH}mm

(400/500/600/900)X50


Body Color



White

Black

Application Area

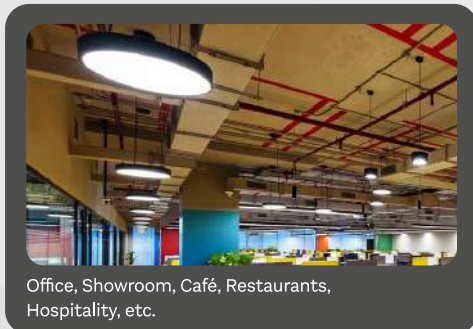

Office, Showroom, Café, Restaurants, Hospitality, etc.

Drum Light

LED Suspended Drum Light

IP20



With its seamless circular form and diffused glow, the Drum light blends elegance with functional design. Perfect for modern offices, reception areas, and premium interiors desiring architectural ambient lighting, lobbies, lounges, and upscale retail or hospitality space.

Model No.
ANRPHLS-40W/80W

Wattage
40W/80W

Color Temperature
6500K/4000K/3000K

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI **Beam Angle**
>80 110°


Body Type
High quality aluminium sheet metal based housing

Lumens
4000 lms(40W) / 8000lms (80W)

Surge Protection
4KV

Dimensions {Each Arm LengthXHeight}mm
(300/600)X72

Body Color



White Black

Application Area




Office, Showroom, Café, Restaurants,
Hospitality, etc.



Hexagonal Drum Light

LED Suspended Light

IP20

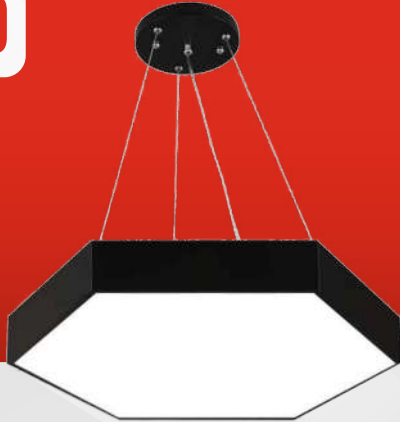

Hexagonal Drum Light is perfect solution where we need different, creative and architectural lights to make our space modern with attractive lights and the light output. It's made of Aluminium and premium milky diffusers. It's available in various sizes based on demands.

Model No.
ANRPHRLS-40W/80W

Wattage
40W/80W

Color Temperature
6500K/4000K/3000K

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI **Beam Angle**
>80 110°


Body Type
High quality aluminium sheet metal based housing

Lumens
4000 lms(40W) / 8000lms (80W)

Surge Protection
4KV

Dimensions {Each Arm LengthXHeight}mm
(300/600)X72

Body Color



White Black

Application Area



Office, Showroom, Café, Restaurants, Hospitality, etc.



Hexagonal Ring Light

LED Suspended Light

IP20

Hexagonal Ring Light whose demand is getting increased day by day specially for modern Offices & design-led spaces. It is made of Aluminium and milky diffuser to deliver smooth light output. It is used individually as well in groups. Many types of powder coating color options are provided based on demand.

Model No.

ANRPCLLS-80W/120W

Wattage

80W/120W

Color Temperature

6500K/4000K/3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

110°

Body Type

High quality aluminium sheet metal based housing

Lumens

8000lms(80W) / 12000lms (120W)

Surge Protection

4KV

Dimensions {LXWXH}mm

1200X600X70


Body Color



White

Black

Application Area

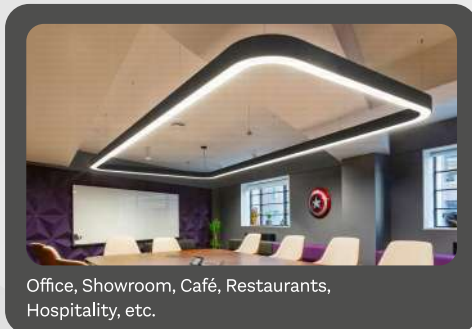

Office, Showroom, Café, Restaurants, Hospitality, etc.

Rectagonal Curve Light

LED Suspended Light

IP20



Rectagonal curve Light is an Architectural Light made of extruded Aluminium with high class milky diffuser to create nice ambience with soothing light. Its curvy corners look so attractive & stylish.

Model No.

ANRLL-1Eye/2Eye/5Eye

Wattage

2W/4W/10W

Color Temperature

3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

30°

Body Type

High quality die-cast aluminium based housing

Lumens

200 lms(2W) / 400lms(4W) / 1000lms(10W)

Surge Protection

4KV

Dimensions {LXWXH}mm

(25X30X35)1Eye/(50X30X35)2Eye/(125X30X35)5Eye

Body Color



White

Black

Application Area



Drawing Room, Kitchen, Bathroom,
Office, Showroom, etc.

Linear
Spot Recess
Light

IP20



Linear spot recess light is a highly efficient modular LED recess downlight encompassing of die-cast aluminium housing and deep recess reflector to cut glare & Suitable for Indoor applications. Best optical and thermal solution for high performance.

Model No.

LSPC-1707/LSPS-1707/LSPDC-1712/
LSPDS-1712/LSPT-1616

Length

2 meter

Body Type

Aluminium with PC Diffuser


Build Quality

High

Profile Channels




1707 CONCEALED



1707 SURFACE



1712 DEEP CONCEALED



1712 DEEP SURFACE



1616 TRIANGULAR

Dimensions/Cut Size (mm)

17x7 mm (LSPC-1707), 17x7 mm (LSPS-1707), 17x12 mm (LSPDC-1712),
17x12 mm (LSPDS-1712), 16x16 mm (LSPT-1616)

Application



Profile Channels Available in 2-meter length. Gives your LED lights a neat and professional finish. Perfect for homes, offices, and showrooms.

Model No.
ANRGD-7W

Wattage
7W

Color Temperature
6500K/4000K/3000K

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI >80 **Beam Angle** 40°

Body Type
High quality PC Based housing

Lumens
700 lms

Surge Protection
4KV

Dimensions (Dia)mm
104

Cutout (Dia)mm
80

Reflector Color

White Black Rose Gold

Body Color

White Black

Application Area



Drawing Room, Kitchen, Bathroom,
Office, Showroom, etc.

Glory

Downlight

IP20



Glory downlight made up of premium PC housing. It also offers a wide choice of option for different color reflectors - Rose Gold, White & Black.

Model No.

ANRMCL-6W/12W/18W

Wattage

6W/12W/18W

Color Temperature

6500K/4000K/3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

40°

Body Type

High quality Die-Cast Aluminium housing

Lumens

600lms(6W) / 1200lms(12W) / 1800lms(18W)

Surge Protection

4KV

Dimensions (Dia)mm

63(6W) / 85(12W) / 90(18W)

Cutout (Dia)mm

60(6W) / 80(12W) / 93(18W)

Reflector Color



White



Gold



Rose
Gold



Shiny
Black



Satin
Nickle

Body Color




White



Black

Application Area

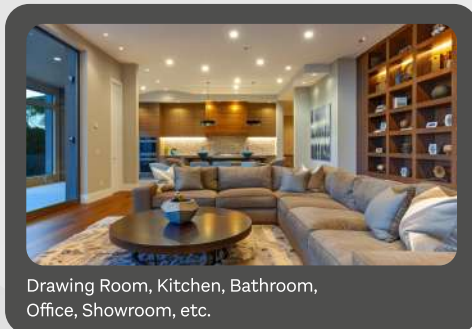

Drawing Room, Kitchen, Bathroom,
Office, Showroom, etc.

Moon

COB Light

IP20



Moon recessed COB downlight made up of die-cast aluminium housing & robust heat sink for excellent thermal management, also it offers a wide choice of option for different color reflectors

Model No.

ANRSC-L-6W/12W/18W

Wattage

6W/12W/18W

Color Temperature

6500K/4000K/3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

40°

Body Type

High quality Die-Cast Aluminium housing

Lumens

600lms(6W) / 1200lms(12W) / 1800lms(18W)

Surge Protection

4KV

Dimensions (Dia)mm

70(6W) / 85(12W) / 95(18W)

Cutout (Dia)mm

65(6W) / 80(12W) / 90(18W)

Reflector Color



Silver



Gold



Rose
Gold



Shiny
Black

Body Color



White



Black

Application Area



Drawing Room, Kitchen, Bathroom,
Office, Showroom, etc.



Star recessed COB downlight made up of die-cast aluminium housing & robust heat sink for excellent thermal management, also it offers a wide choice of option for different color reflectors

Model No.

ANRCM-3W/6W/12W/18W/30W/50W

Wattage

3W/6W/12W/18W/30W/50W

Color Temperature

6500K/4000K/3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

50°

Body Type

High quality Die-Cast Aluminium housing

Lumens

300lms(3W) / 600lms(6W) / 1200lms(12W) / 1800lms(18W) / 3000lms(30W) / 5000lms(50W)

Surge Protection

4KV

Dimensions (Dia)mm

55(3W) / 85(6W) / 105(12W) / 118(18W) / 160(30W/50W)

Body Color




White

Cutout (Dia)mm

50(3W) / 70(6W) / 90(12W) / 110(18W) / 130(30W/50W)

Application Area

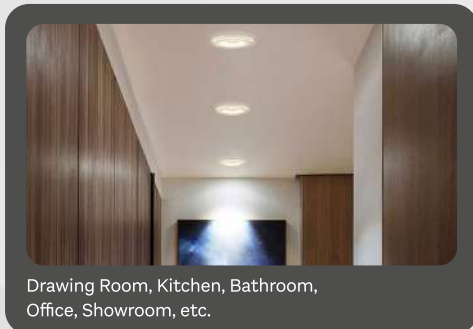

Drawing Room, Kitchen, Bathroom,
Office, Showroom, etc.

COB Movable

IP20



Recessed COB movable downlight made of die-cast aluminium housing and robust heat sink for excellent thermal management. It consists of high efficiency reflector to produce excellent light output.

Model No.

ANRCC-6W/12W/18W

Wattage

6W/12W/18W

Color Temperature

6500K/4000K/3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

30°

Body Type

High quality Die-cast Aluminium based housing

Lumens

600 lms / 1200 lms / 1800 lms

Surge Protection

4KV

Dimensions {DiaXH}mm

51X70(6W) / 70X90(12W) / 95X101(18W)

Reflector Color



Silver



Rose
Gold



Shiny
Black

Body Color




White



Black

Application Area

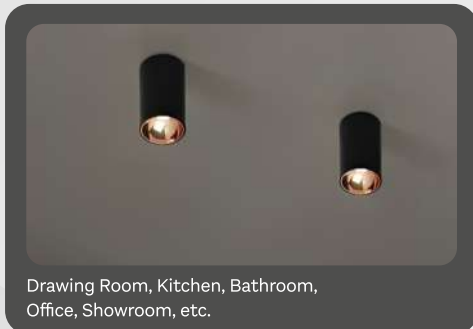

Drawing Room, Kitchen, Bathroom,
Office, Showroom, etc.

COB Cylinder

Surface Mounted

IP20



COB cylinder downlight with extruded aluminum housing & die-cast heat sink. It has efficient COB & reflector for better light distribution suitable for retail, hospitality & residential application area.

Model No.

ANRTL/WTL-10W/20W/30W/40W

Wattage

10W/20W/30W/40W

Color Temperature

6500K/4000K/3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

25°

Body Type

High quality Die-cast Aluminium based housing

Lumens

1000 lms(10W) / 2000 lms(20W) / 3000 lms(30W) / 4000 lms(40W)

Surge Protection

4KV

Dimensions {DiaXH}mm


50X100(10W) / 62X130(20W) / 75X160(30W) / 90X190(40W)

Body Color



White Black

Application Area

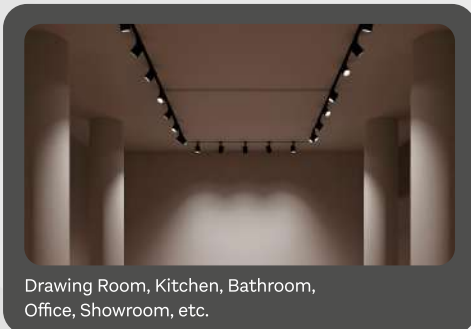

Drawing Room, Kitchen, Bathroom,
Office, Showroom, etc.



Track light design with die cast housing & heat sink for efficient heat dissipation. Ideal for retail & hospitality. Optical lens with narrow beam angle for better light distribution. Optical and thermal solution for high performance

Model No.
ANRDD-12W/18W

Wattage
12W/18W

Color Temperature
6500K/3000K

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI >80 **Beam Angle** 100°

Body Type
High quality PC based housing

Lumens
1200 lms(12W) / 1800 lms(18W)

Surge Protection
4KV

Dimensions (Dia)mm
119(12W) / 149(18W)


Cutout (Dia)mm
98(12W) / 127(18W)

Body Color



White

Application Area

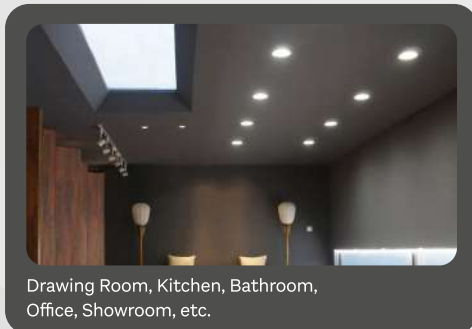

Drawing Room, Kitchen, Bathroom,
Office, Showroom, etc.

Deep Downlight

IP20



Deep recessed round shape backlit LED Downlighter with engineering polycarbonate housing and MCPCB based LED load. It will enhance the indoor interior and will provide the smooth glare free light.



Indoor Lighting Range

Model No.
ANRD-0.5W

Wattage
0.5W

Color Temperature
White/Yellow/Orange/R/G/B

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI **Beam Angle**
>80 180°

Body Type
High quality PC housing

Lumens
50lms

Dimensions (Dia)mm
60

Base

B22

Application Area



Hotel & Restaurants, Residence, Bathroom, Staircase, Decoration, Retail, etc.



Energy-efficient 0.5W LED bulb available in vibrant White, Yellow, Orange, Red, Green, and Blue hues ideal for mood lighting, décor, and low-power applications.

Model No.
ANRAB-5W

Wattage
5W

Color Temperature
Red/Green/Blue

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI >80 **Beam Angle** 180°

Body Type
High quality PC & die-cast aluminium based housing

Lumens
500lms

Surge Protection
4KV

Dimensions (Dia)mm
90

Base




B22



E27

Application Area

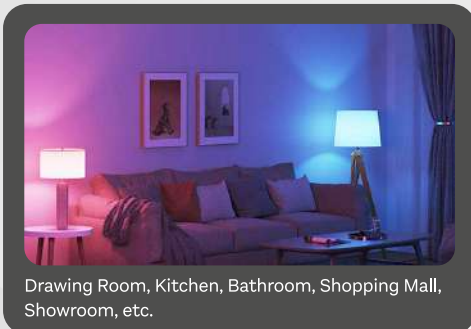

Drawing Room, Kitchen, Bathroom, Shopping Mall, Showroom, etc.



Durable 5W LED bulb with PC housing, available in vivid Red, Green, and Blue colors. Perfect for accent and decorative lighting.

Model No.
ANRAB-12W

Wattage
12W

Color Temperature
Yellow

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI >80 **Beam Angle** 180°

Body Type
High quality PC & die-cast aluminium based housing

Lumens
1200lms

Surge Protection
4KV

Dimensions (Dia)mm
117

Base




B22



E27

Application Area

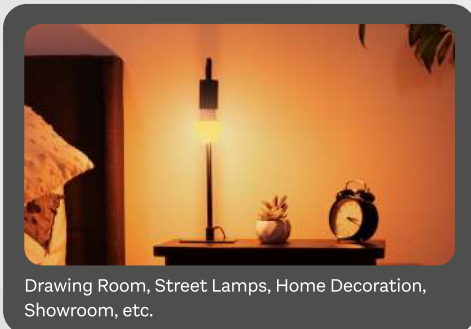

Drawing Room, Street Lamps, Home Decoration, Showroom, etc.



High-performance 12W Yellow LED bulb with PC housing and wide 180° beam angle, ideal for ambient and Indoor lighting.

Model No.

ANRAB-3W/5W/7W/9W/12W/
14W/18W/20W

Wattage

3W/5W/7W/9W/12W/14W/18W/20W

Color Temperature

6500K / 3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

180°

Body Type

High quality PC based housing

Lumens

300lms(3W) / 500lms(5W) / 700lms(7W) / 900lms(9W) / 1200lms(12W) /
1400lms(14W) / 1500lms(15W) / 1800lms(18W) / 2000lms(20W)

Surge Protection

4KV

Dimensions (Dia)mm

90(3/5/7W) / 106(9W) / 117(12W) / 123(14W) / 135(15W) / 150(18W)
/ 230(20W)

Base



B22



E27

Application Area



Drawing Room, Kitchen, Bathroom, Shopping Mall,
Showroom, etc.



Dhoom

LED Bulbs

IP20



LED bulbs in 3W to 20W with high-quality PC housing, 180° beam angle, >80 CRI, available in 6500K & 3000K CCT, ideal for efficient general lighting.

Model No.

ANRAB-25W/30W/40W/50W

Wattage

25W/30W/40W/50W

Color Temperature

3000K/6500K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

180°

Body Type

High quality PC based housing

Lumens

2500lms(25W) / 3000lms(30W) / 4000lms(40W) / 5000lms(50W)

Surge Protection

4KV

Dimensions (Dia)mm

140(25W) / 165(30W) / 190(40W) / 215(50W)

Base




B22



E27

Application Area

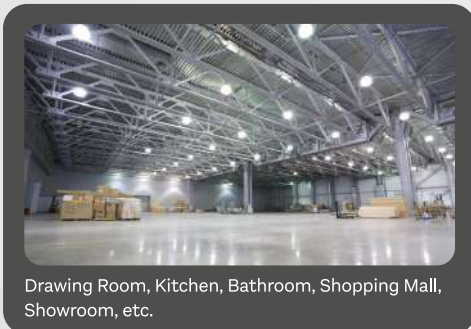

Drawing Room, Kitchen, Bathroom, Shopping Mall, Showroom, etc.



High wattage LED Bulbs, designed to provide you with energy-efficient lighting while delivering exceptional brightness and longevity.

Model No.
ANRIVB-9W

Wattage
9W

Color Temperature
6500K

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI >80 **Beam Angle** 180°

Body Type
High quality PC based housing

Lumens
900lm

Surge Protection
4KV

Dimensions (Dia)mm
142

Base



B22



2000 mAh Battery
3.7 Volt



Upto
4Hrs Backup



Application Area



Drawing Room, Kitchen, Bathroom, Shopping Mall, Showroom, etc.

9W inverter LED bulb with high-quality PC housing, wide beam angle, 2000mAh battery, 4-hour backup, and 6500K CCT, perfect for uninterrupted lighting during power cuts.

Model No.

ANRTLTP-5W/10W/20W/
24W/40W

Wattage

5W/10W/20W/24W/40W

Color Temperature

6500K / 3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

120°

Body Type

High quality PC based housing

Lumens

500lms(5W) / 1000lms(10W) / 2000lms(20W) /
2400lms(24W) / 4000lms(40W)

Surge Protection

4KV

Dimensions {LXWXH}mm

(265X29X20)5W / (565X29X20)10W / (1100X32X29)20W /
(1127X36X23)24W / (1175X36X40)40W


Body Color



White



Application Area

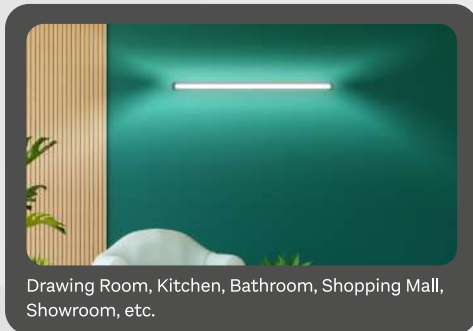

Drawing Room, Kitchen, Bathroom, Shopping Mall,
Showroom, etc.

LED battens in 5W to 40W with high-quality PC housing, wide beam angle, >80 CRI, and 6500K & 3000K CCT, ideal for uniform and efficient illumination.

Model No.
ANRDP-5W

Wattage
5W

Color Temperature
6500K/4000K/3000K/R/G/B

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI **Beam Angle**
>80 110°

Body Type
High quality PC based housing

Lumens
500 lms

Surge Protection
4KV

Dimensions (Dia)mm
104

Cutout (Dia)mm
75

Body Color



White

Application Area



Drawing Room, Kitchen, Bathroom,
Office, Showroom, etc.

Dhruv Plus

LED Concealed Light

IP20



Sleek round LED concealed made up of PC housing which is designed as a reflector to give high lumen efficacy. Also opal diffuser is fixed in inner periphery of trim to cut down the glare & provide uniform light output.

Model No.
ANRRD-7W

Wattage
7W

Color Temperature
6500K/3000K/R/G/B

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI **Beam Angle**
>80 120°

Body Type
High quality PC based housing

Lumens
700 lms

Surge Protection
4KV

Dimensions (Dia)mm
104


Cutout (Dia)mm
75

Body Color



White

Application Area

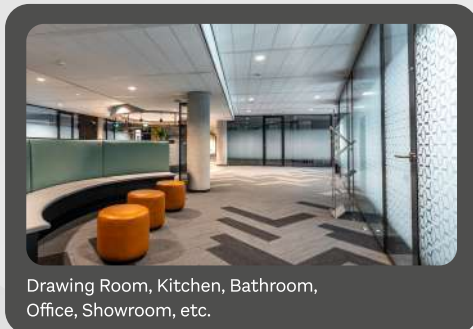

Drawing Room, Kitchen, Bathroom,
Office, Showroom, etc.

Radiant

LED Concealed Light

IP20



Sleek round LED concealed crafted from premium PC housing with a reflector design for high lumen output. It offers high CRI for true color rendering and an opal diffuser for glare-free, uniform lighting.

Model No.
BLCL-407

Wattage
7W

Color Temperature
6500K/3000K/R/G/B/Pink

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI >80 **Beam Angle** 120°

Body Type
High quality PC based housing

Lumens
700 lms

Surge Protection
4KV

Dimensions (Dia)mm
108


Cutout (Dia)mm
70

Body Color



White

Application Area

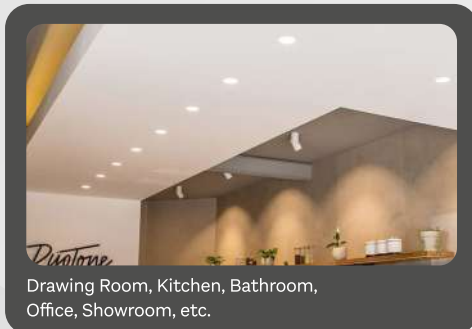

Drawing Room, Kitchen, Bathroom,
Office, Showroom, etc.

407 Blueline

LED Concealed Light

IP20



Sleek 7W round LED concealed with high-quality PC housing designed as a reflector for enhanced lumen efficacy. An opal diffuser fitted along the inner trim minimizes glare and delivers uniform light output. Available in 6500K, 3000K, Red, Green, Blue, and Pink color temperatures for versatile lighting needs.

Model No.
ANRCP-7W

Wattage
7W

Color Temperature
6500K/3000K/R/G/B/Purple

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI >80 **Beam Angle** 120°

Body Type
High quality PC based housing

Lumens
700 lms

Surge Protection
4KV

Dimensions (Dia)mm
104


Cutout (Dia)mm
80

Body Color



White

Application Area

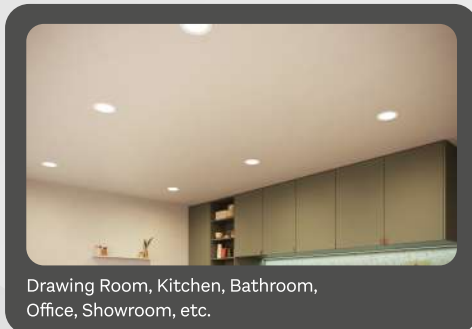

Drawing Room, Kitchen, Bathroom,
Office, Showroom, etc.

Premium

LED Concealed Light

IP20



Sleek 7W round LED concealed made of high-quality PC housing designed as a reflector for high lumen efficacy. Features a high CRI for enhanced color rendering and an opal diffuser on the inner trim to minimize glare and ensure uniform light distribution.

Model No.
ANRVC-9W

Wattage
9W

Color Temperature
6500K/3000K/R/G/B/Purple

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI **Beam Angle**
>80 110°

Body Type
High quality die-cast aluminium based housing

Lumens
900 lms

Surge Protection
4KV

Dimensions (Dia)mm
104


Cutout (Dia)mm
80

Body Color



White

Application Area

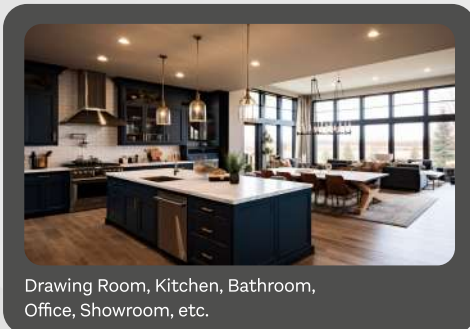

Drawing Room, Kitchen, Bathroom,
Office, Showroom, etc.



Sleek round LED concealed crafted with high-quality die-cast aluminium based housing designed as a reflector for superior lumen efficacy. An opal diffuser along the inner trim ensures uniform light output and reduced glare, while decorative chrome rings add a stylish and modern touch.

Model No.
ANRSC-8W/15W

Wattage
8W/15W

Color Temperature
6500K/4000K/3000K

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI **Beam Angle**
>80 120°

Body Type
High quality PC based housing

Lumens
800 lms(8W) / 1500 lms(15W)

Surge Protection
4KV

Dimensions (Dia)mm
104(8W) / 121(15W)


Cutout (Dia)mm
75(8W) / 80(15W)

Body Color



White

Application Area

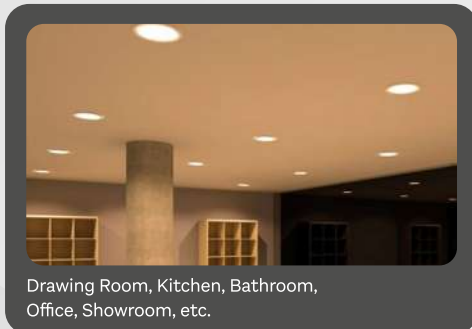

Drawing Room, Kitchen, Bathroom,
Office, Showroom, etc.



Sigma adjustable LED downlight fits in all deep, concealed box & ceiling, made up of high-quality PC housing and premium reflector for superior lumen efficacy. It fits in all deep, concealed box and ceiling. An opal diffuser along the inner trim ensures uniform light output and reduced glare.

Model No.
ANRAR-2W

Wattage
2W

Color Temperature
6500K/3000K/R/G/B/Pink

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI **Beam Angle**
>80 36°

Body Type
High quality PC based housing

Lumens
200 lms

Surge Protection
4KV

Dimensions {Dia / (LXW)}mm
42 / 42X42

Body Color

White

Cutout {Dia / (LXW)}mm
33 / 33X33

Application Area



Drawing Room, Kitchen, Bathroom,
Office, Showroom, etc.



The round and square spotlight combines a sharp design with energy efficient LED module. The high quality lens further enhances the quality of the product which is housed within a engineering polycarbonate housing.

Model No.
ANRD3C-3W

Wattage
3W

Color Temperature
6500K/3000K

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI >80 **Beam Angle** 110°

Body Type
High quality PC based housing

Lumens
300 lms

Surge Protection
4KV

Dimensions (Dia)mm
72

Cutout (Dia)mm
51

Body Color



White

Application Area



Drawing Room, Kitchen, Bathroom,
Office, Showroom, etc.



3W Small adjustable recess COB downlight with polycarbonate housing & lens with 15 degree tilt option.

Model No.
ANRMND-3W

Wattage
3W

Color Temperature
6500K/3000K/R/G/B

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI >80 **Beam Angle** 120°

Body Type
High quality PC based housing

Lumens
300 lms

Surge Protection
4KV

Dimensions (Dia)mm
79


Cutout (Dia)mm
39

Body Color



White

Application Area

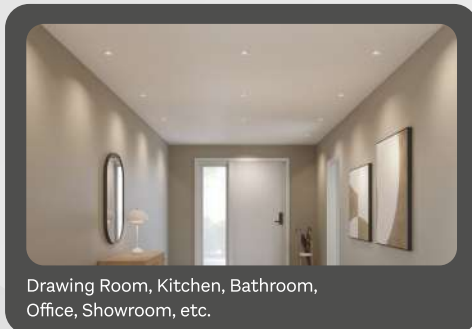

Drawing Room, Kitchen, Bathroom,
Office, Showroom, etc.



High efficient Deep Junction downlight encompassing of polycarbonate die-cast and deep recess diffuser to cut glare & Suitable for multiple applications.

Model No.
ANRRC-7W

Wattage
7W

Color Temperature
6500K/4000K/3000K

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI >80 **Beam Angle** 120°

Body Type
High quality PC based housing

Lumens
700 lms

Surge Protection
4KV

Dimensions (Dia)mm
104


Cutout (Dia)mm
76

Body Color



White

Application Area

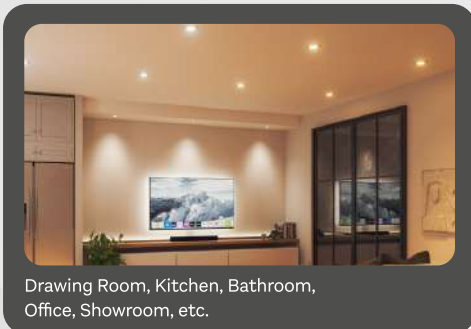

Drawing Room, Kitchen, Bathroom,
Office, Showroom, etc.



Small adjustable recessed downlight with PC based housing, reflector with 15 degree tilt option & excellent heat sink capability to minimize lumen degradation.

Model No.
ANRLS-7W

Wattage
7W

Color Temperature
6500K/3000K/R/G/B

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI >80 **Beam Angle** 120°

Body Type
High quality PC based housing

Lumens
700 lms

Surge Protection
4KV

Dimensions (Dia)mm
110


Cutout (Dia)mm
70

Body Color



White

Application Area

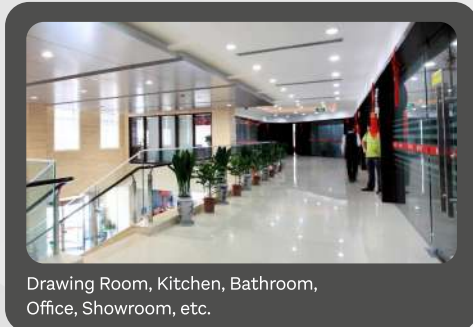

Drawing Room, Kitchen, Bathroom,
Office, Showroom, etc.

Lattu

Surface LED Light

IP20



Round shaped surface mounted LED light with unique design. Gives a unique and decorative look to your interior.

Model No.

ANRW(R/S)-8W/15W/22W

Wattage

8W/15W/22W

Color Temperature

6500K/4000K/3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

120°

Body Type

High quality PC based housing with acrylic diffuser

Lumens

800 lms(8W) / 1500 lms(15W) / 2200 lms(22W)

Surge Protection

4KV

Dimensions {Dia} / {LXW}mm

114(8W) / 165(15W) / 227(22W) - Round

114X114(8W) / 165X165(15W) / 227X227(22W) - Square

Body Color



White

Cutout {Dia} / {LXW}mm

101(8W) / 149(15W) / 203(22W) - Round

101X101(8W) / 149X149(15W) / 203X203(22W) - Square

Application Area



Mall, Office, Showroom, etc.

Wonder

Backlit Panel Light

IP20



Compact & sleek round LED backlit downlight made up of polycarbonate housing, high efficacy LEDs, high grade material diffuser to give uniform & glare free output.

Model No.

ANRSP(R/S)-6W/12W/18W/24W

Wattage

6W/12W/18W/24W

Color Temperature

6500K/4000K/3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

120°

Body Type

High quality PC based housing with acrylic diffuser

Lumens

600 lms(6W) / 1200 lms(12W) / 1800 lms(18W) / 2400 lms(24W)

Surge Protection

4KV

Dimensions {Dia / (LXW)}mm

95(6W) / 130(12W) / 149(18W) / 171(24W) - Round

95X95(6W) / 130X130(12W) / 149X149(18W) / 171X171(24W) - Square

Body Color



White

Cutout {Dia / (LXW)}mm

76(6W) / 107(12W) / 127(18W) / 149(24W) - Round

76X76(6W) / 107X107(12W) / 127X127(18W) / 149X149(24W)-Square

Application Area



Mall, Office, Showroom, etc.



Compact & sleek round LED backlit downlight made up of polycarbonate housing, high efficacy LEDs, high grade material diffuser to give uniform & glare free output.

Model No.

ANRTS(R/S)-6W/12W/18W

Wattage

6W/12W/18W

Color Temperature

6500K/4000K/3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

120°

Body Type

High quality PC based housing with acrylic diffuser

Lumens

600 lms(6W) / 1200 lms(12W) / 1800 lms(18W)

Surge Protection

4KV

Dimensions {Dia / (LXW)}mm

92(6W) / 120(12W) / 155(22W) - Round

92X92(6W) / 120X120(12W) / 155X155(22W) - Square

Body Color




White

IP20



Application Area

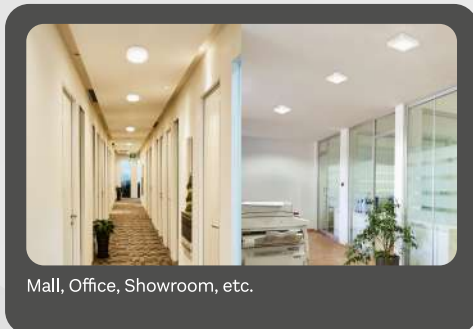

Mall, Office, Showroom, etc.

Surface trimless round/square backlit downlight with high efficacy LEDs with highly efficient and low glare diffuser for optimum light distribution

Model No.
ANRPLS-24W

Wattage
24W

Color Temperature
6500K/4000K/3000K

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95


CRI >80 **Beam Angle** 120°

Body Type
High quality aluminium housing
and PC diffuser

Lumens
2400 lms


Surge Protection
4KV

Dimensions {Dia / (LXW)}mm
D-295 / L-295XB-295

Body Color
 
White

Cutout {Dia / (LXW)}mm
D-286 / L-286XB-286

Application Area

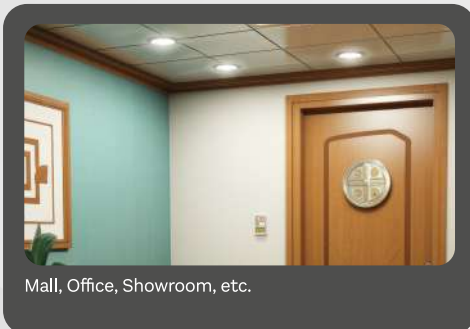

Sleek round and square shape aluminium LED downlight load with highly efficient low glare diffuser for optimum light distribution. Aluminium body for better heat dissipation.

Model No.
ANRPL-40W

Wattage
40W

Color Temperature
6500K/4000K/3000K

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI **Beam Angle**
>80 120°

Body Type
High quality aluminium housing
and PC diffuser

Lumens
4000 lms

Surge Protection
4KV

Dimensions {LXW}mm
600X600

Body Color




White

Cutout {LXW}mm
589X589



Application Area

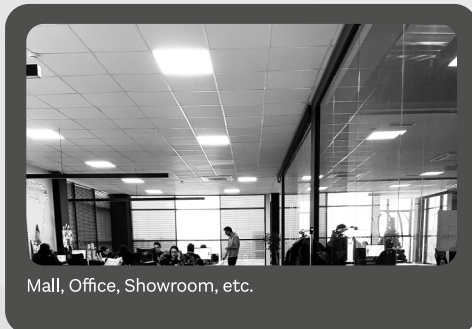

Mall, Office, Showroom, etc.

LED Recessed luminaire, suitable for 600X600 module and is enclosed with high efficient flat PMMA low glare diffuser.

Model No.
ANRPLS-40W

Wattage
40W

Color Temperature
6500K/4000K/3000K

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI **Beam Angle**
>80 120°

Body Type
High quality aluminium housing
and PC diffuser

Lumens
4000 lms

Surge Protection
4KV

Dimensions {LXW}mm
600X600

Body Color



White

Application Area



Mall, Office, Showroom, etc.



A surface LED 2x2 luminaire made up of extruded aluminium to give a full glow effect with low glare diffuser and high efficient LEDs.

Model No.

ANRSSL-240

Wattage

40W

Color Temperature

6500K/4000K/3000K/R/G/B/P/
AMBER/ICE BLUE

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

No. of LED

240 LED per mtr.

Body Type

High quality PC material

Efficacy

100 lms/W

Surge Protection

4KV

Dimensions (Length)


5 Mtr.

Warranty

1 Year



Application Area

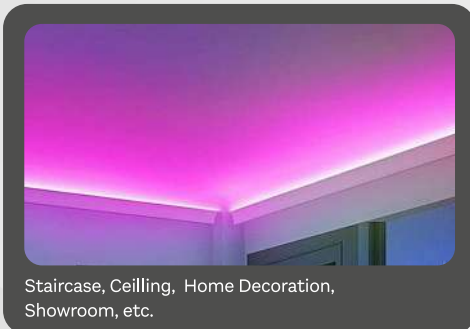

Staircase, Ceiling, Home Decoration,
Showroom, etc.

Sparkle LED striplight made of bright LED chips, high quality thermal PCB board for high light output.

Model No.

ANRSSL-240

Wattage

60W

Color Temperature

6500K/4000K/3000K/R/G/B/P/
AMBER/ICE BLUE

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

No. of LED

240 LED per mtr.

Body Type

High quality PC material

Efficacy

100 lms/W

Surge Protection

4KV

Dimensions (Length)


5 Mtr.

Warranty

2 Years



Application Area

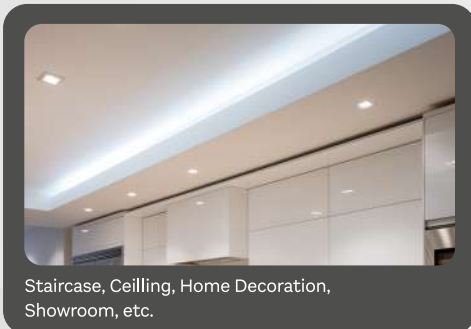

Staircase, Ceilling, Home Decoration,
Showroom, etc.

Glitz LED premium striplight made of bright LED chips, high quality thermal PCB board for high light output.

Model No.
ANRNSM-5A/10A

Wattage
60W/120W

Current
Constant Volt


Input Voltage
100-275V/50-60Hz

Output
(12V/5Amp) / (12V/10Amp)

Body Type
Aluminium Metal Body

Surge Protection
4KV

Application Area

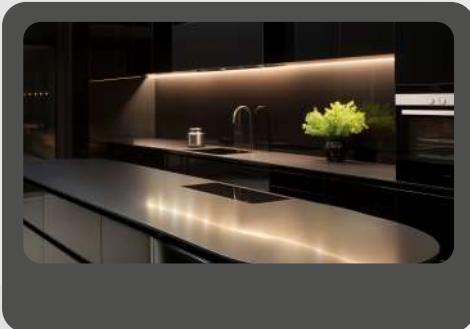

Neo

SMPS Driver

IP20



Constant voltage LED driver for striplights, available in 5A and 10A. Ensures stable output with high efficiency and built-in protection for reliable, long-term performance.

Outdoor Lighting Range

Street Lights



Explore our indoor lighting range, crafted to elevate ambience, comfort, and style across residential, commercial, and hospitality spaces.

Flood Lights



Wall Lights



Model No.

LSKL-1Way/2Way

Wattage

5W/10W

Color Temperature

3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Body Type

High quality Die-Cast Aluminium based housing

Surge Protection

4KV


Dimensions {LXWXH}mm

70X79X60

140X79X60

Note: CRI is based on 6500K CCT

Application Area

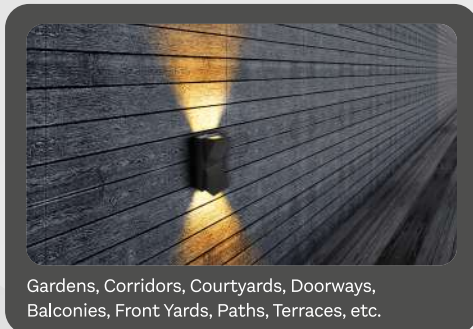

Gardens, Corridors, Courtyards, Doorways,
Balconies, Front Yards, Paths, Terraces, etc.

K-Wall Light

Up & Down LED Wall Light

IP65



Up & Down wall Scone Light is used to give classy look to your home Interior. Made up of die-cast aluminium body for better heat dissipation.

Model No.

ANROL-2WAY/4WAY/6WAY/8WAY

Wattage

3W/6W/9W/12W

Color Temperature

3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Body Type

High quality Die-Cast Aluminium based housing

Lumens

300 lms(3W) / 600 lms(6W) / 900 lms(9W) / 1200 lms(12W)

Surge Protection


4KV

Dimensions {LXWXH}mm

73X38X79(3W) / 111X38X79(6W) / 168X50X79(9W) / 206X50X79(12W)

Note: CRI is based on 6500K CCT

Application Area

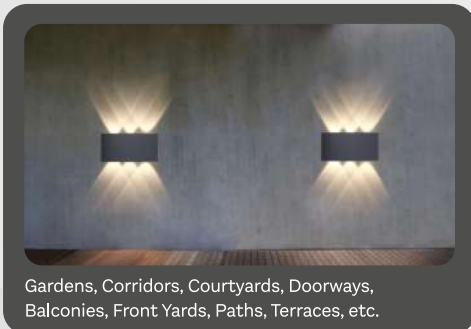

Gardens, Corridors, Courtyards, Doorways,
Balconies, Front Yards, Paths, Terraces, etc.

Ovel Up & Down LED Light

IP65



Up & Down Wall Sconce Light is used to give rustic touch/Classy Look to your home Interior/Outdoor.

Model No.
ANRWLL-3WAY

Wattage
5W

Color Temperature
3000K

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI
>80


Body Type
High quality Die-Cast Aluminium
based housing

Surge Protection
4KV

Dimensions {LXWXH}mm
47X57X89

Note: CRI is based on 6500K CCT

Application Area

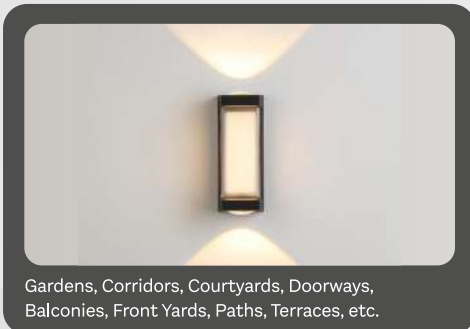

Gardens, Corridors, Courtyards, Doorways,
Balconies, Front Yards, Paths, Terraces, etc.

Wall Lamp Light

IP65



This 3Way wall lampshade made of high-quality die-cast aluminum and acrylic lampshade. This outdoor wall light has passed professional tests to ensure water resistance.

Model No.

ANR3W-2WAY / ANR6W-4WAY

Wattage

3W/6W

Color Temperature

3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Body Type

High quality Die-Cast Aluminium based housing

Lumens


300 lms(3W) / 600 lms(6W)

Surge Protection

4KV

Note: CRI is based on 6500K CCT

Application Area

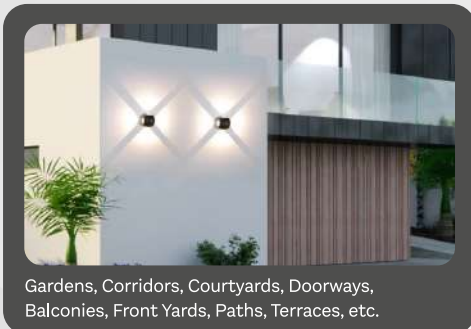

Gardens, Corridors, Courtyards, Doorways,
Balconies, Front Yards, Paths, Terraces, etc.

Ball Wall Light

IP65



Dimensions {LXWXH}mm

57X44X57(3W/6W)

Premium 2Way/4Way LED lamp beads make the wall light with high lighting efficiency and no UV or IR radiation, not only perfect for lighting but also perfect for decoration purpose.

Model No.
ANR4WD-4WAY

Wattage
6W

Color Temperature
3000K

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI
>80

Body Type
High quality Die-Cast Aluminium based housing


Lumens
600 lms

Surge Protection
4KV

Dimensions {LXWXH}mm
44X44X44

Note: CRI is based on 6500K CCT

Application Area

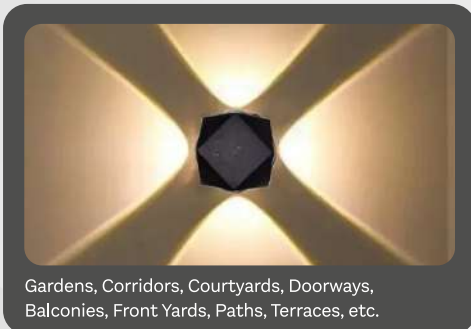

Gardens, Corridors, Courtyards, Doorways,
Balconies, Front Yards, Paths, Terraces, etc.

Diamond Wall Light

IP65



Blending classic charm with a modern twist, this stylish fixture features a distinctive diamond-shaped body. Its geometric elegance and sleek matte black finish bring a bold, decorative flair to any wall.

Model No.
ANR5W-5WAY

Wattage
8W

Color Temperature
3000K

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI
>80

Body Type
High quality Die-Cast Aluminium based housing


Lumens
800 lms

Surge Protection
4KV

Dimensions {LXWXH}mm
44X44X44

Note: CRI is based on 6500K CCT

Application Area

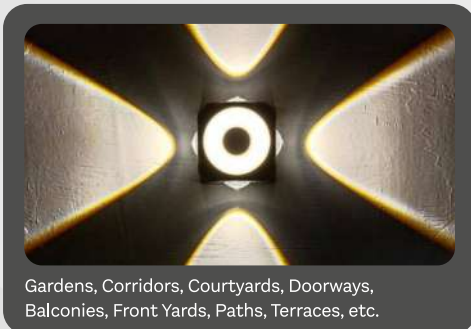

Gardens, Corridors, Courtyards, Doorways,
Balconies, Front Yards, Paths, Terraces, etc.

5Way Ball Wall Light

IP65



The 5-Way Ball Wall Light features a round diffused front glow with four directional wall washers, housed in durable die-cast aluminium body. It adds striking visual appeal and ambient lighting to any wall.

Model No.

ANRSWL-4WAY/6WAY/8WAY

Wattage

6W/9W/12W

Color Temperature

3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Body Type

High quality Die-Cast Aluminium based housing

Lumens

600 lms(6W) / 900 lms(9W) / 1200 lms(12W)

Surge Protection


4KV

Dimensions {LXWXH}mm

101X44X101(4Way) / 117X47X117(6Way) / 155X47X155(8Way)

Note: CRI is based on 6500K CCT

Application Area

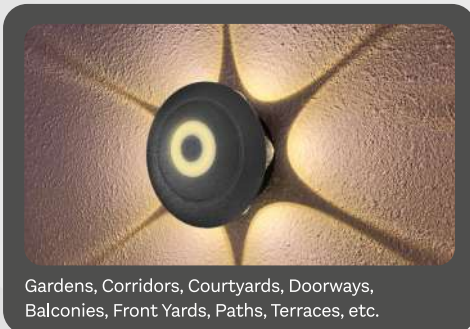

Gardens, Corridors, Courtyards, Doorways,
Balconies, Front Yards, Paths, Terraces, etc.

Star Wall Light

IP65



Compatible with an updated look on a classic design, this attractive light fixture is modernized with a round body. Compatible with geometric appeal, and boasts a sleek matt black finish which gives a decorative look to the wall.

Model No.
ANRFLP-25W

Wattage
25W

Color Temperature
6500K/3000K/R/G/B/P

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI **Beam Angle**
>80 75°

Body Type
High quality polycarbonate body
with high quality lens

Lumens
2500lms(25W)

Surge Protection
6KV

Dimensions {LXWXH}mm
145X30X135

Body Color



White

Application Area



Backyard, Stores, Roads, Parks, etc.

PC Flood Light

IP66



Polycarbonate LED flood light with Elegant squarish design with modular lens. Simple design and aesthetic with cradle mounting facility.

Model No.

ANRFLE-50W/100W/150W/200W/
300W/400W

Wattage

50W/100W/150W/200W/
300W/400W

Color Temperature

6500K/3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

75°

Body Type

High quality die-cast aluminium based housing and toughened heat resistant Glass

Lumens

5000lms(50W) / 10000lms(100W) / 15000(150W) / 20000lms(200W) /
30000(300W) / 40000(40W)

Surge Protection

4KV

Dimensions {LXWXH}mm


210X27X148(50W) / 260X27X200(100W) / 305mm27X228(150W) /
356X27X254(200W) / 360X27X255(300W) / 450X27X320(400W)

Body Color



White

Application Area

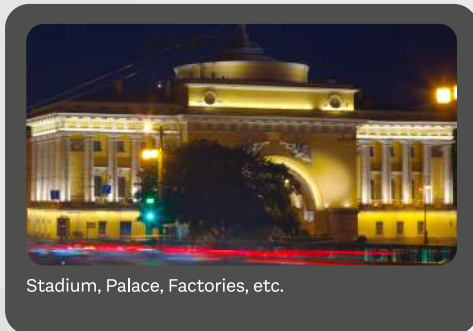

Stadium, Palace, Factories, etc.

E-Series LED Flood Light

IP65



E-Series LED flood light with Elegant squarish design with modular lens and toughened glass. Powder coated finish with cradle mounting facility.

Model No.

ANRFLP-50W/100W/200W

Wattage

50W/100W/200W

Color Temperature

6500K/3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

95°

Body Type

High quality Die-Cast Aluminium housing

Lumens

5000lms(50W) / 10000lms(100W) / 20000lms(200W)

Surge Protection

6KV

Dimensions {LXWXH}mm


250X35X265(50W) / 270X50X280(100W) / 290X70X305(200W)

Body Color



White

Application Area

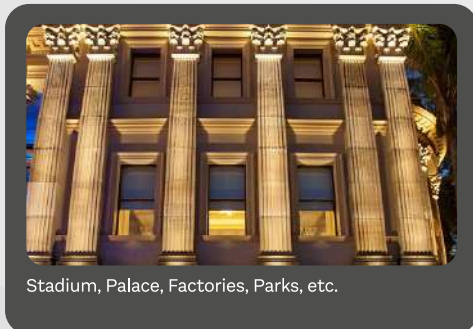

Stadium, Palace, Factories, Parks, etc.

Prime-Series LED Flood Light

IP66



Prime-Series LED flood light with Elegant squarish design with modular lens. Powder coated finish with cradle mounting facility.

Model No.

ANRFLN-60W/120W/240W

Wattage

60W/120W/240W

Color Temperature

6500K/3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

75°

Body Type

High quality Die-Cast Aluminium housing

Lumens

6000lms(60W) / 12000lms(120W) / 24000lms(240W)

Surge Protection

6KV

Dimensions {LXWXH}mm

250X35X265(60W) / 270X50X285(120W) /
290X70X305(240W)

Body Color



White

Application Area



Stadium, Palace, Factories, Parks, etc.

Neo-Series LED Flood Light

IP66



Neo-Series LED flood light with Elegant squarish design with modular lens. Powder coated finish with cradle mounting facility.

Model No.

ANRFL-30W/50W/100W/
150W/200W/250W

Wattage

30W/50W/100W/150W/200W/
250W

Color Temperature

6500K/3000K/R/G/B/P

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

75°

Body Type

High quality die-cast aluminium based housing and toughened heat resistant Glass

Lumens

3000(30W) / 5000lms(50W) / 10000lms(100W) / 15000(150W) /
20000lms(200W) / 25000(250W)

Surge Protection

6KV

Dimensions {LXWXH}mm


180X45X180(30W) / 225X45X220(50W) / 280X61X270(100W)
369X61X333(150W/200W) / 430X85X315(250W)

Body Color



White

Application Area

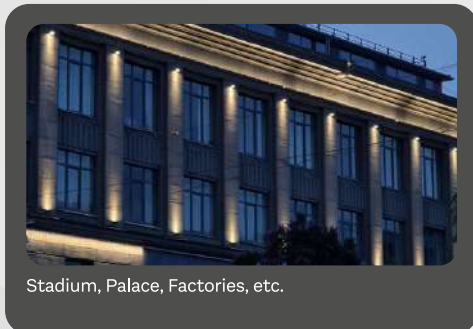

Stadium, Palace, Factories, etc.

R-Series LED Flood Light

IP65



R-Series LED flood light with Elegant squarish design with toughened Glass. Powder coated finish with cradle mounting facility.

Model No.

ANRFL-300W/400W/500W

Wattage

300W/400W/500W

Color Temperature

6500K/3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

90°

Body Type

High quality die-cast aluminium based housing and heat resistant PC lens & Glass

Lumens

30000lms(300W) / 40000lms(400W) / 50000lms(500W)

Surge Protection

6KV

Dimensions {LXWXH}mm

380X135X300(300W) / 427X150X362(400W) / 500X70X380(500W)

Body Color



Dark Grey

I-Series LED Flood Light

IP66



Application Area



Stadium, Palace, Factories, Parks, etc.

I-Series LED flood light with Elegant squarish design with modular lens and toughened glass. Powder coated finish with cradle mounting facility.

Model No.

ANRHB-50W/100W/150W

Wattage

50W/100W/150W

Color Temperature

6500K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

75°

Body Type

High quality die-cast aluminium based housing and heat resistant PC lens & Glass

Lumens

5000lms(50W) / 10000lms(100W) /15000lms(150W)

Surge Protection

6KV

Dimensions {DiaXHeight}mm

260X152

Body Color



Dark Grey

Application Area



Factory, Gym, Warehouse etc.

Highbay Light

IP66



This LED Highbay is a hassle free replacement of general highbay in industries. Product comes with light efficacy of 100 lm/W. Aluminum die cast with sleek & Unique designed heat sink provide thermal management to natural convection.

Model No.
ANRSTP-20W

Wattage
20W

Color Temperature
6500K/3000K

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI >80 **Beam Angle** 90°

Body Type
High quality Polycarbonate Housing

Lumens
2000 lms

Surge Protection
6KV

Dimensions {LXWXH}mm
112X50X305

Pole Dia (mm)
43mm

Body Color



Black

Application Area



Highway, Park, Streets, Parking, etc.

PC Street Light

IP66



LED polycarbonate street light Powered with high efficacy LED chips to give the best light output.

Model No.

ANRST-24W/50W

Wattage

24W/50W

Color Temperature

6500K/3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

90°

Body Type

High quality die-cast aluminium based housing and heat resistant PC lens

Lumens

2400 lms / 5000lms

Surge Protection

6KV

Dimensions {LXWXH}mm

120X45X260(24W) / 170X50X350(50W)

Body Color



Black

Pole Dia (mm)

43mm

Street Light

IP65



Application Area



Highway, Park, Streets, Parking, etc.

LED street light with high pressure die-cast aluminium body and heat resistant polycarbonate lens cover. Powered with high efficacy LED chips to give the best light output.

Model No.
ANRSST-50W/100W

Wattage
50W/100W

Color Temperature
6500K/3000K

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI >80 **Beam Angle** 90°

Body Type
High quality die-cast aluminium based housing and heat resistant PC lens

Lumens
5000 lms(50W) / 10000 lms(100W)

Surge Protection
6KV

Dimensions {LXWXH}mm
170X50X350

Pole Dia (mm)
43mm

Body Color



Black



Sensor based
On/Off Light

Application Area



Highway, Park, Streets, Parking, etc.

Sensor Street Light

IP66



LED sensor street light with high pressure die-cast aluminium body and heat resistant polycarbonate lens cover. Powered with high efficacy LED chips to give the best light output.

Model No.

ANRST-18W/30W/50W/100W/150W

Wattage

18W/30W/50W/100W/150W

Color Temperature

6500K/3000K

Input Voltage

100-275V/50-60Hz

Power Factor

≥0.95

CRI

>80

Beam Angle

90°

Body Type

High quality die-cast aluminium based housing and heat resistant PC lens

Lumens

1800 lms(18W) / 3000 lms(30W) / 5000 lms(50W) / 10000 lms(100W) / 15000 lms(150W)

Surge Protection

6KV

Dimensions {LXWXH}mm

120X45X260(18W) / 125X39X340(30W) / 170X50X350(50W) / 170X37X450(100W/150W)

Body Color



Black

Pole Dia (mm)

43mm

IP65



Aluminium Street Light

Application Area



Highway, Park, Streets, Parking, etc.

LED street light with high pressure die-cast aluminium body and heat resistant polycarbonate lens cover. Powered with high efficacy LED chips to give the best light output.

Model No.
ANRST-150W/250W

Wattage
150W/250W

Color Temperature
6500K

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI **Beam Angle**
>80 90°

Body Type
High quality die-cast aluminium based housing and heat resistant PC lens & Glass

Lumens
15000 lms(150W) / 25000 lms(250W)

Surge Protection
6KV

Dimensions {LXWXH}mm
204X45X363


Pole Dia (mm)
43mm

Body Color



Black

Application Area

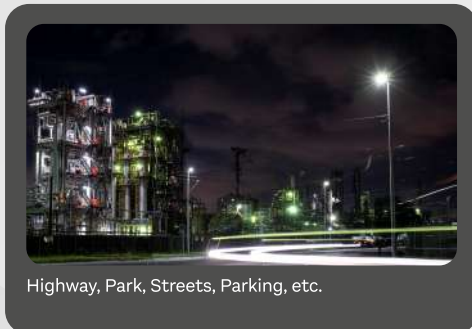

Highway, Park, Streets, Parking, etc.

Industrial Street Light

IP66



LED street light with high pressure die-cast aluminium body and heat resistant polycarbonate lens cover. Powered with high efficacy LED chips to give the best light output.

Model No.
ANRTRL-120

Wattage
10W/mtr.

Color Temperature
Tricolour

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI **No. of LED**
>80 120 LED per mtr

Body Type
High quality PC material


Efficacy
100 lms/W

Surge Protection
4KV

Dimensions (Length)
18 Mtr.



Application Area

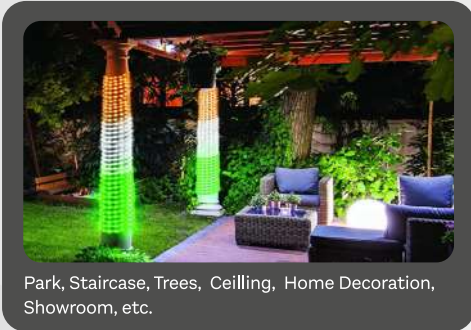

Tiranga rope light ensures uniform glow around curves and edges, making complex shapes like the flag's stripes stand out brilliantly. Reliable for outdoor flag displays during Independence Day or Republic Day events, even under harsh sunlight and rain.

Model No.
ANRRL-120

Wattage
9W/mtr.

Color Temperature
6500K/4000K/3000K/R/G/B/P/
AMBER/ICE BLUE/MULTICOLOR

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI **No. of LED**
>80 120 LED per mtr

Body Type
High quality PC material

Efficacy
100 lms/W

Surge Protection
4KV

Dimensions (Length)
45 Mtr.


Warranty
1 Year

Rope Light Standard

IP65



Application Area

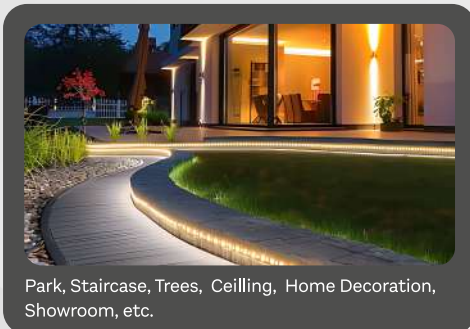

Park, Staircase, Trees, Ceilling, Home Decoration, Showroom, etc.

Standard LED Flexible rope light delivering vibrant, uniform illumination with high energy efficiency and customizable length. Engineered for seamless installation with excellent color consistency and dynamic dimming capabilities. Ideal for accent lighting, cove lighting, and creative architectural highlights & outdoor lighting.

Model No.
ANRRL-120

Wattage
10W/mtr.

Color Temperature
6500K/4000K/3000K/R/G/B/P/
AMBER/ICE BLUE/MULTICOLOR

Input Voltage
100-275V/50-60Hz

Power Factor
≥0.95

CRI **No. of LED**
>80 120 LED per mtr

Body Type
High quality PC material

Efficacy
100 lms/W

Surge Protection
4KV

Dimensions (Length)
50 Mtr.

Warranty
2 Years

Rope Light Premium

IP65



Application Area



Park, Staircase, Trees, Ceiling, Home Decoration, Showroom, etc.

Premium LED Flexible rope light delivering vibrant, uniform illumination with high energy efficiency and customizable length. Engineered for seamless installation with excellent color consistency and dynamic dimming capabilities. Ideal for accent lighting, cove lighting, and creative architectural highlights & outdoor lighting.

Model No.

ANRRLA- 2Amp/4Amp

Wattage

24W/48W

Current

Constant Volt

Input Voltage

100-275V/50-60Hz

Output

(12V/2Amp)/(12V/4Amp)

Body Type


High quality PC material

Rope Light Adaptor

IP20



Application Area

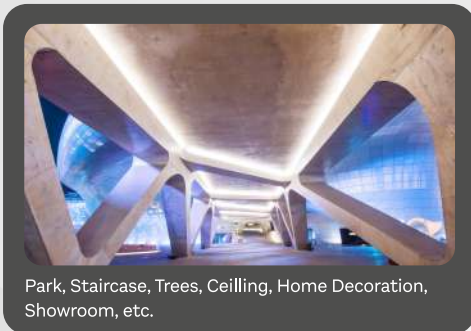

Park, Staircase, Trees, Ceiling, Home Decoration, Showroom, etc.

Rope light adaptor Compact and reliable, this LED rope light adapter ensures safe and consistent power supply for seamless, long-lasting illumination. Ideal for indoor and outdoor rope light applications.



Electrical Accessories and Appliances

Explore our electrical accessories range, featuring power distribution boxes, strip boards, tapes, and sound bars for safe, smart, and efficient solutions.

Model No.

ANRTP-1Mtr./2Mtr.

Length

1 meter/2 meter

Body Type

Aluminium

Build Quality

High

Colors



White Black

Track Patti



Track Patti Available in 1-meter & 2-meter length. Comes in elegant Black and White colors. Perfect for mounting and adjusting track lights with ease and style.

Model No.

LSPC-1707/LSPS-1707/LSPDC-1712/
LSPDS-1712/LSPT-1616

Length

2 meter

Body Type

Aluminium with PC Diffuser


Build Quality

High

Profile Channels




1707 CONCEALED



1707 SURFACE



1712 DEEP CONCEALED



1712 DEEP SURFACE



1616 TRIANGULAR

Dimensions/Cut Size (mm)

17x7 mm (LSPC-1707), 17x7 mm (LSPS-1707), 17x12 mm (LSPDC-1712),
17x12 mm (LSPDS-1712), 16x16 mm (LSPT-1616)

Application



Profile Channels Available in 2-meter length. Gives your LED lights a neat and professional finish. Perfect for homes, offices, and showrooms.

Model No.

ANRPSSG-(2Y/4Y)/(ANRPSBS)-2Y/4Y

Yard

2 Yard/4 Yard

Body Type

Metal / PVC

Extension

4+1


Voltage

6Amp. 240Volts

Bright Star Power Strip



Recommended For:

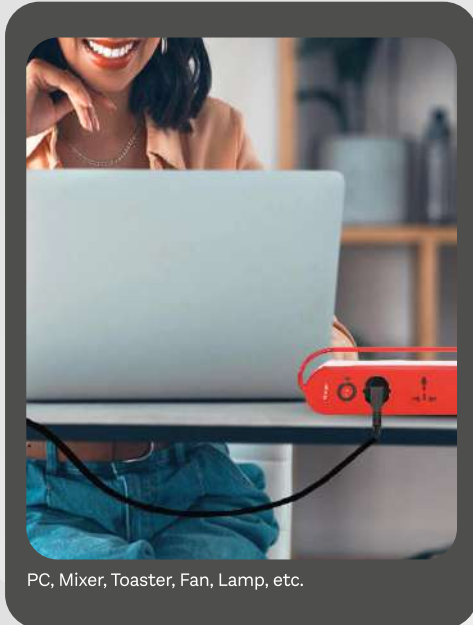

PC, Mixer, Toaster, Fan, Lamp, etc.

Compact 4-pin Power Strip Extension Board available in Super Gold (Metal) and Bright Star (PVC) variants. Supports 6 Amp, 240 Volts. Ideal for home or office use with enhanced durability and safety.

Warning: Not for usage of high wattage devices

Model

Triangle Waterproof/Jumbo Waterproof/
Indicator

Wattage

1000W/1500W/2000W

Power Consumption

230V.AC

IS:368:2014



CM/L-8100156005

SAFETY



IS:302-2-201
CM/L-8100155912



Heat Indicator Lamp



Water Level Indicator



Extra Long Life

Recommended For:



Home, Hospitality, etc.

Electric Immersion Rod



Jumbo

Triangle

Indicator

Manufactured with the high quality filling Powder which have high properties of Insulation Density and conduction. Used Nichrome wire which has melting point of over 17500 and corrosion resistivity.Used Non Ferrous parts only. Accurate Element certification by process of latest technology.

Model No.

ANRMCBC - 4Way/6Way/8Way/
10Way/12Way/16Way

Body Type

Metal

Build Quality

Heavy Duty

Dimensions (LXWXH)mm

158X82X203(4Way)

193X82X203(6Way)

228X82X203(8Way)

263X82X203(10Way)

304X82X203(12Way)

368X82X203(16Way)

MCB

Distribution Box



COATED WITH
NEROLAC
PAINT



Home, Offices, Restaurants, Café, Hospitality, etc.

Heavy-duty Metal MCB Distribution Box designed for reliable circuit management and protection. Available in 4Way, 6Way, 8Way, 10Way, 12Way, and 16Way options. Durable construction ensures safe, long-lasting use in residential and commercial setups.

Model No.
ANRET - 7M./15M.

Length
7 meter/15 meter

Width
17mm




Flame Retardant

IS:7809



Part-3/sec 1

Electrical Insulation Tape

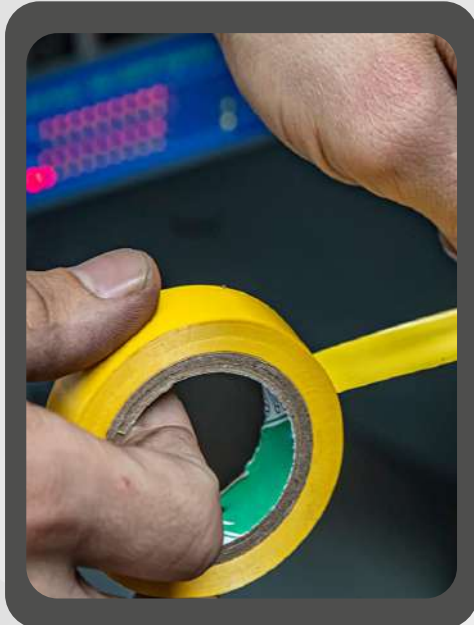

Flame Retardant Electrical Insulation Tape available in 7-meter and 15-meter rolls with 17mm width. Offers strong adhesion, flexibility, and safety. Ideal for wire insulation, bundling, and protection



UltraTech **Building Solutions**

Collaborated with



for **PAN India**
Lighting Solutions



LITESUN FOUNDATION®

Not Just Light, We Spread Hope.

LITESUN FOUNDATION – Not Just Light, We Spread Hope – reflects our deep-rooted belief in creating lasting social impact beyond business. Through tree plantation drives, awareness campaigns, support for underprivileged communities, and regular health and wellness camps, we work to uplift lives and protect nature. Every LITESUN product you choose contributes to this mission, helping us reach those in need, educate for a better tomorrow, and build a healthier, greener future. Together, we illuminate lives with care, compassion, and purpose.



Tree Plantation



Honoring and awarding prizes to board exam toppers



Blood Donation & Health Check-up Camps



Water filter installation at gov. school



Chabil Lassi Sewa



LITESUN GLOBAL INDUSTRY PVT. LTD.

1st Floor, Vishwas complex,
Kishangarh Road, Shahabad (M)
Dist. Kurukshetra, Haryana,
India 136135.



info@litesun.in



1800 843 0055 (Toll Free)



www.litesun.in



@litesunglobal



@litesunglobal



@litesunglobal



@litesunglobal



@litesunglobal



All Online Links