



INDOOR  
OUTDOOR

# LED PRODUCTS CATALOGUE

MAY 2025



WIDEST RANGE OF LED LIGHTING PRODUCTS

Email: [info@litesun.in](mailto:info@litesun.in)

 1800 843 0055 (Toll Free)

Website: [www.litesun.in](http://www.litesun.in)



Follow Us- [f](#) [i](#) [X](#)

## We as **LITESUN**

### Origin:

**LITESUN**, Founded **10 Years** ago, our journey began with a passion for innovation and a dedication to providing energy-efficient lighting solutions that enhance lives and environments.

### Motive:

We understand the pivotal role lighting plays in everyday life, we strive to offer **eco-friendly** LED lighting solutions that not only reduce energy consumption but also contribute to a brighter, greener future.

### Present:

At present, LITESUN stands as a beacon of reliability and excellence in the industry, running successfully across North India with a strong network of 10,000+ retailers. Trusted by millions of people, businesses, and communities.

### Future:

As we look ahead, our focus remains on innovation, sustainability, and customer satisfaction. We are dedicated to develop more efficient, versatile, and aesthetically pleasing lighting solutions.

### LITESUN FOUNDATION:

At **LITESUN**, We Initiated LITESUN FOUNDATION to help the society. Every year we help many people who need help in various way. Every time you choose us a contribution of yours is going to the society.



# Product Categories

**B1**

0.5w, 3w, 5w, 7w, 9w Tubelight (Pride)  
5w, 10w, 20w & 40w.

**B2**

Inverter bulb, 12w, 14w, 15w, 18w, 25w,  
30w, 40w & 50w.

**O1**

Concealed Lights, Panel lights, downlights,  
Rope Lights, Surface Lights, Spot Lights, Cob lights,  
Strip Lights, Track Lights & Wall Lights.

**O2**

Flood Lights, Street Lights &  
Highbay Lights .

**O3**

Power Strip (Extension), Electric Tape, Modular  
Box, Mcb Box, Smpps Driver, Rope Light Adaptor  
& soundbar.

# LED DECO BULB



## Technical Specifications:

|               |                                    |
|---------------|------------------------------------|
| Model No.     | ANRD-0.5W                          |
| Wattage       | 0.5W                               |
| Input Voltage | 100-275V/50-60HZ                   |
| Body Type     | High quality PC based housing      |
| Colour Temp.  | WHITE/YELLOW/RED/GREEN/BLUE/ORANGE |

\*B1

**Available Wattage : 0.5W**

**Available Colours: WHITE, YELLOW, RED, GREEN, BLUE, ORANGE**

## Applications:



LITESUN IS A REGISTERED TRADEMARK

# RGB LED BULBS



## Technical Specifications:


|               |                               |
|---------------|-------------------------------|
| Model No.     | ANRAB-5W                      |
| Wattage       | 5W                            |
| Input Voltage | 100-275V/50-60HZ              |
| Body Type     | High quality PC based housing |
| Colour Temp.  | RED/GREEN/BLUE                |
| Beam Angle    | 180°                          |
| Cap:          | B22/E27                       |

\*B1

**Available Wattage : 5W**

**Available Colours: GREEN, RED, BLUE**

## Applications:

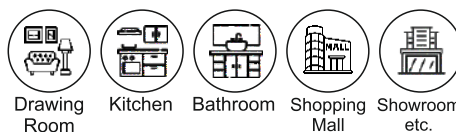

LITESUN IS A REGISTERED TRADEMARK

5



# YELLOW BULB



## Technical Specifications:


|               |                               |
|---------------|-------------------------------|
| Model No.     | ANRAB-12W                     |
| Wattage       | 12W                           |
| Input Voltage | 100-275V/50-60HZ              |
| Body Type     | High quality PC based housing |
| Colour Temp.  | Yellow                        |
| Beam Angle    | 180°                          |
| Cap:          | B22/E27                       |

\*B2

**Available Wattage : 12W**

**Available Colours: YELLOW**

## Applications:

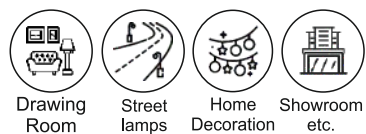



#### Technical Specifications:

| Model No.     | ANRAB-5W                      | ANRAB-7W | ANRAB-9W | ANRAB-12W | ANRAB-14W | ANRAB-15W | ANRAB-18W |
|---------------|-------------------------------|----------|----------|-----------|-----------|-----------|-----------|
| Wattage       | 5W                            | 7W       | 9W       | 12W       | 14W       | 15W       | 18W       |
| Input Voltage | 100-275V/50-60HZ              |          |          |           |           |           |           |
| CRI           | >80                           |          |          |           |           |           |           |
| Body Type     | High quality PC based housing |          |          |           |           |           |           |
| Colour Temp.  | CW/WW                         |          |          |           |           |           |           |
| Lumen (lm)    | 500 lm                        | 700 lm   | 900 lm   | 1200 lm   | 1400 lm   | 1500 lm   | 1800 lm   |
| Beam Angle    | 180°                          | 180°     | 180°     | 180°      | 180°      | 180°      | 180°      |
| Cap:          | B22/E27                       |          |          |           |           |           |           |

\*B1-5, 7, 9 - \*B2-12, 14, 15, 18  
All the technical details are \*Based on 6500K CCT

**Available in: 5, 7, 9, 12, 14, 15 & 18W**

**Available Colours: CW, WW**

#### Applications:



Drawing Room



Kitchen



Bathroom



Shopping Mall



Showroom etc.



LITESUN IS A REGISTERED TRADEMARK

7



# HIGH WATTAGE BULB



## Technical Specifications:

| Model No.     | ANRAB-25W                     | ANRAB-30W | ANRAB-40W | ANRAB-50W |
|---------------|-------------------------------|-----------|-----------|-----------|
| Wattage       | 25W                           | 30W       | 40W       | 50W       |
| Input Voltage | 100-275V/50-60HZ              |           |           |           |
| CRI           | >80                           |           |           |           |
| Body Type     | High quality PC based housing |           |           |           |
| Colour Temp.  | CW/WW                         |           |           |           |
| Lumen (lm)    | 2500 lm                       | 3000 lm   | 4000 lm   | 5000 lm   |
| Cap:          | B22/E27                       |           |           |           |

\*B2

All the technical details are \*Based on 6500K CCT

**Available Wattage : 25, 30, 40 & 50W**

**Available Colours: CW, WW**

Applications:



Warehouse



Mall



Factory

LITESUN IS A REGISTERED TRADEMARK

8



2000 mAh Battery  
3.7 Volt.



## LED INVERTER BULB

### Technical Specifications:

| Model No.    | ANRIVB-9W           |
|--------------|---------------------|
| Wattage      | 9W                  |
| Colour Temp. | CW                  |
| Battery      | 2000 mAh. 3.7 Volt. |
| Lumen (lm)   | 900 lm              |

**Available Wattage : 9W    Available Colours: CW**

Applications:



Drawing  
Room



Kitchen



Bathroom




Shopping  
Mall



Showroom  
etc.



LITESUN IS A REGISTERED TRADEMARK

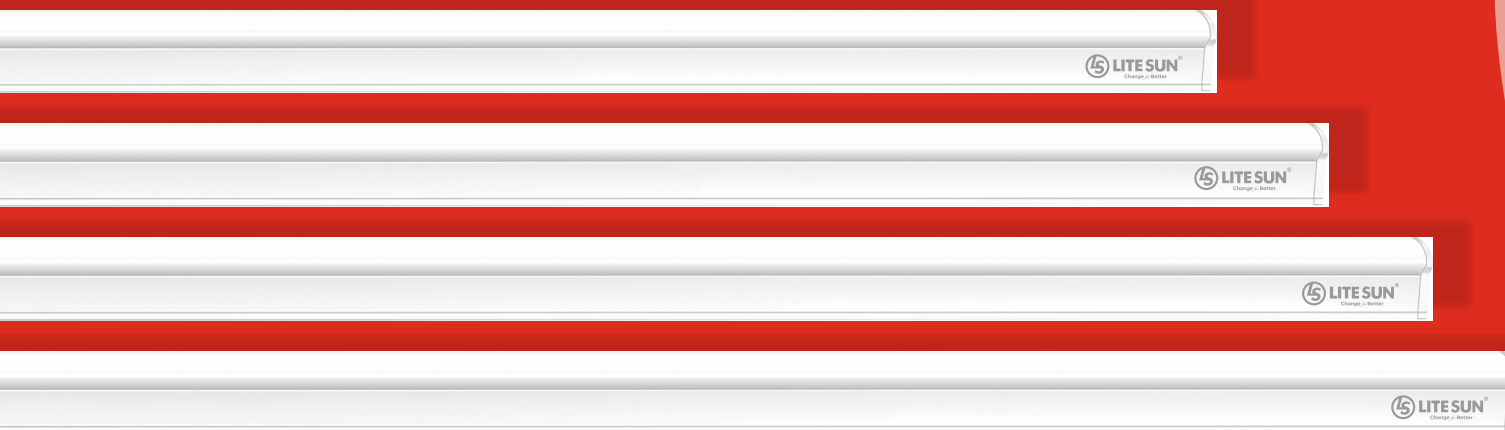

# PRIDE

## LED TUBE LIGHT

### Technical Specifications:

| Model No.     | ANRTLP-5W                     | ANRTLP-10W | ANRTLP-20W | ANRTLP-40W |
|---------------|-------------------------------|------------|------------|------------|
| Wattage       | 5W                            | 10W        | 20W        | 40W        |
| Length        | 300 mm                        | 525 mm     | 1100 mm    | 1175 mm    |
| Input Voltage | 100-275V/50-60HZ              |            |            |            |
| CRI           | >80                           |            |            |            |
| Body Type     | High quality PC based housing |            |            |            |
| Colour Temp.  | CW/WW                         |            |            |            |
| Lumen (lm)    | 500 lm                        | 1000 lm    | 2000 lm    | 4000 lm    |


\*B1

All the technical details are \*Based on 6500K CCT

**Available Wattage : 5, 10, 20 & 40W**

**Available Colours: CW, WW**

### Applications:

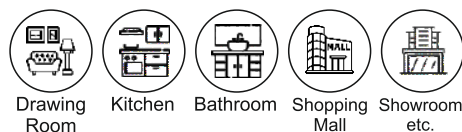

LITESUN IS A REGISTERED TRADEMARK

10



# DHRUV *Plus*

## CONCEALED LIGHT

### Technical Specifications:

|               |                               |
|---------------|-------------------------------|
| Model No.     | ANRDP-5W                      |
| Wattage       | 5W                            |
| Size          | 104 mm                        |
| Cutting size  | Ø75                           |
| Input voltage | 100-275V/50-60HZ              |
| CRI           | >80                           |
| Body Type     | High quality PC based housing |
| Colour temp.  | CW/WW/RED/GREEN/BLUE          |
| Lumen (lm)    | 500 lm                        |

\*O1

All the technical details are \*Based on 6500K CCT

**Available Wattage: 5W**

**Available Colours: CW, WW, RED, GREEN, BLUE**

### Applications:



Drawing Room



Kitchen



Bathroom



Office



Showroom etc.



LITESUN IS A REGISTERED TRADEMARK

11



## DHRUV CONCEALED LIGHT

### Technical Specifications:

|               |                               |
|---------------|-------------------------------|
| Model No.     | ANRDH-5W                      |
| Wattage       | 5W                            |
| Size          | 104 mm                        |
| Cutting size  | Ø80                           |
| Input voltage | 100-275V/50-60HZ              |
| CRI           | >80                           |
| Body Type     | High quality PC based housing |
| Colour temp.  | CW/WW/RED/GREEN/BLUE/PURPLE   |
| Lumen (lm)    | 500 lm                        |

\*O1  
All the technical details are \*Based on 6500K CCT

**Available Wattage : 5W**

**Available Colours: CW, WW, RED, GREEN, BLUE, PURPLE**

### Applications:



Drawing Room



Kitchen



Bathroom



Shopping Mall



Showroom etc.



LITESUN IS A REGISTERED TRADEMARK

12



## VENUS CONCEALED LIGHT

### Technical Specifications:


|               |                                               |
|---------------|-----------------------------------------------|
| Model No.     | ANRVC-7W                                      |
| Wattage       | 7W                                            |
| Size          | 104 mm                                        |
| Cutting size  | Ø80                                           |
| Input voltage | 100-275V/50-60HZ                              |
| CRI           | >80                                           |
| Body Type     | High quality die cast aluminium based housing |
| Colour temp.  | CW/WW/RED/BLUE/PURPLE                         |
| Lumen (lm)    | 700 lm                                        |

\*O1  
All the technical details are \*Based on 6500K CCT

**Available Wattage : 7W**

**Available Colours: CW, WW, RED, BLUE, PURPLE**

### Applications:

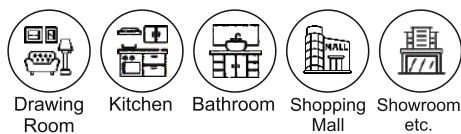

## PREMIUM CONCEALED LIGHT



### Technical Specifications:

|               |                               |
|---------------|-------------------------------|
| Model No.     | ANRCP-7W                      |
| Wattage       | 7W                            |
| Size          | 104 mm                        |
| Cutting size  | Ø80                           |
| Input voltage | 100-275V/50-60HZ              |
| CRI           | >80                           |
| Body Type     | High quality PC based housing |
| Colour temp.  | CW/WW/RED/GREEN/BLUE/PURPLE   |
| Lumen (lm)    | 700 lm                        |

\*O1

All the technical details are \*Based on 6500K CCT

**Available Wattage : 7W**

**Available Colours: CW, WW, RED, BLUE, PURPLE**

### Applications:



Drawing  
Room



Kitchen



Bathroom



Office



Showroom  
etc.



LITESUN IS A REGISTERED TRADEMARK

**407**  
BLUELINE series  
CONCEALED LIGHT



Technical Specifications:

|               |                               |
|---------------|-------------------------------|
| Model No.     | BLCL-407                      |
| Wattage       | 7W                            |
| Size          | 108 mm                        |
| Cutting size  | Ø70                           |
| Input voltage | 100-275V/50-60HZ              |
| CRI           | >80                           |
| Body Type     | High quality PC based housing |
| Colour temp.  | CW/WW/RED/GREEN/BLUE/PINK     |
| Lumen (lm)    | 700 lm                        |

\*01

All the technical details are \*Based on 6500K CCT

**Available Wattage : 7W**

**Available Colours: CW, WW, RED, BLUE, PINK**

Applications:



Drawing Room



Kitchen



Bathroom



Office



Showroom etc.

LITESUN IS A REGISTERED TRADEMARK

15



## RIGEL CONCEALED LIGHT

### Technical Specifications:

|               |                               |
|---------------|-------------------------------|
| Model No.     | ANRRC-7W                      |
| Wattage       | 7W                            |
| Size          | 108 mm                        |
| Cutting size  | Ø76                           |
| Input voltage | 100-275V/50-60HZ              |
| CRI           | >80                           |
| Body Type     | High quality PC based housing |
| Colour temp.  | CW/WW/NW                      |
| Lumen (lm)    | 700 lm                        |

\*O1

All the technical details are \*Based on 6500K CCT

**Available Wattage : 7W**

**Available Colours: CW, WW, NW**

### Applications:



Drawing Room



Kitchen



Bathroom



Office



Showroom etc.

LITESUN IS A REGISTERED TRADEMARK

16

*★ New! ★*



## SIGMA ADJUSTABLE

FITS IN ALL DEEP, CONCEALED BOX & CEILING

### Technical Specifications:

| Model No.     | ANRSC-8W                      | ANRSC-15W |
|---------------|-------------------------------|-----------|
| Wattage       | 8W                            | 15W       |
| Size          | 104 mm                        | 121 mm    |
| Cutting size  | Adjustable                    |           |
| Input voltage | 100-275V/50-60HZ              |           |
| CRI           | >80                           |           |
| Body Type     | High quality PC based housing |           |
| Colour temp.  | CW/WW/NW                      |           |
| Lumen (lm)    | 800 lm                        | 1500 lm   |

\*O1  
All the technical details are \*Based on 6500K CCT

**Available Wattage : 8W, 15W**

**Available Colours: CW, WW, NW**

### Applications:



Drawing Room



Kitchen



Bathroom



Office



Showroom etc.

LITESUN IS A REGISTERED TRADEMARK



## D3C DEEP DOWNLIGHT

### Technical Specifications:

| Model No.     | ANRD3C-3W                     |
|---------------|-------------------------------|
| Wattage       | 3W                            |
| Size          | 72 mm                         |
| Cutting size  | ø51                           |
| Input voltage | 100-275V/50-60HZ              |
| CRI           | >80                           |
| Body Type     | High quality PC based housing |
| Colour temp.  | CW/WW                         |
| Lumen (lm)    | 300 lm                        |

\*O1

All the technical details are \*Based on 6500K CCT

**Available Wattage : 3W**

**Available Colours: CW, WW**

### Applications:



Drawing  
Room



Kitchen



Bathroom



Office



Showroom  
etc.

LITESUN IS A REGISTERED TRADEMARK

18



## MERCURY NEO DEEPLIGHT

### Technical Specifications:

| Model No.     | ANRMND-3W                     |
|---------------|-------------------------------|
| Wattage       | 3W                            |
| Size          | 79 mm                         |
| Cutting size  | ø39                           |
| Input voltage | 100-275V/50-60HZ              |
| CRI           | >80                           |
| Body Type     | High quality PC based housing |
| Colour temp.  | CW/WW/RED/GREEN/BLUE          |
| Lumen (lm)    | 300 lm                        |

\*O1  
All the technical details are \*Based on 6500K CCT

**Available Wattage : 3W**

**Available Colours: CW, WW, RED, GREEN, BLUE**

### Applications:



Drawing  
Room



Kitchen



Bathroom



Office



Showroom  
etc.

# MERCURY DEEPLIGHT



## Technical Specifications:

|               |                               |
|---------------|-------------------------------|
| Model No.     | ANRMD-3W                      |
| Wattage       | 3W                            |
| Size          | 79 mm                         |
| Cutting size  | ø39                           |
| Input voltage | 100-275V/50-60HZ              |
| CRI           | >80                           |
| Housing       | High quality PC based housing |
| Colour temp.  | CW/WW/RED/GREEN/BLUE          |
| Lumen (lm)    | 300 lm                        |

\*O1

All the technical details are \*Based on 6500K CCT

**Available Wattage : 3W**

**Available Colours: CW, WW, RED, GREEN, BLUE**

Applications:



Drawing  
Room



Kitchen



Bathroom



Office



Showroom  
etc.

LITESUN IS A REGISTERED TRADEMARK

20



# ARENA

## SPOT LIGHT

### Technical Specifications:

|               |                               |
|---------------|-------------------------------|
| Model No.     | ANRAR-2W                      |
| Wattage       | 2W                            |
| Size          | 42 mm                         |
| Cutting size  | ø33                           |
| Input voltage | 100-275V/50-60HZ              |
| CRI           | >80                           |
| Body Type     | High quality PC based housing |
| Colour temp.  | CW/WW/RED/GREEN/BLUE/PINK     |
| Lumen (lm)    | 200 lm                        |

\*O1  
All the technical details are \*Based on 6500K CCT

**Available Wattage : 2W**

**Available Colours: CW, WW, RED, GREEN, BLUE, PINK**

### Applications:



Drawing Room



Kitchen



Bathroom



Office



Showroom etc.

LITESUN IS A REGISTERED TRADEMARK



## LATTU SURFACE LIGHT

### Technical Specifications:

|               |                               |
|---------------|-------------------------------|
| Model No.     | ANRLS-7W                      |
| Wattage       | 7W                            |
| Input voltage | 100-275V/50-60HZ              |
| CRI           | >80                           |
| Body Type     | High quality PC based housing |
| Colour temp.  | CW/WW/RED/GREEN/BLUE/PURPLE   |
| Lumen (lm)    | 700 lm                        |
| Mounting      | Surface                       |

\*O1  
All the technical details are \*Based on 6500K CCT

### Available Wattage : 7W

### Available Colours: CW, WW, RED, GREEN, BLUE, PURPLE

### Applications:



Drawing  
Room



Kitchen



Bathroom



Office



Showroom  
etc.

LITESUN IS A REGISTERED TRADEMARK

22

*★ New! ★*



## SPARK PANEL

### Technical Specifications:

| Model No.     | ANRSP(R/S)-6W                                  |         | ANRSP(R/S)-12W |          | ANRSP(R/S)-18W |          | ANRSP(R/S)-24W |          |
|---------------|------------------------------------------------|---------|----------------|----------|----------------|----------|----------------|----------|
| Wattage       | 6W                                             |         | 12W            |          | 18W            |          | 24W            |          |
| Size          | ø95                                            | S/95 mm | ø130           | S/130 mm | ø149           | S/149 mm | ø171           | S/171 mm |
| Cutting size  | ø76                                            | ø76 mm  | ø107           | S/107 mm | ø127           | S/127 mm | ø149           | S/149 mm |
| Input Voltage | 100-275V/50-60HZ                               |         |                |          |                |          |                |          |
| CRI           | >80                                            |         |                |          |                |          |                |          |
| Body Type     | High quality PC based housing with PC diffuser |         |                |          |                |          |                |          |
| Colour Temp.  | CW/WW/NW                                       |         |                |          |                |          |                |          |
| Lumen (lm)    | 600 lm                                         |         | 1200 lm        |          | 1800 lm        |          | 2400 lm        |          |

\*O1  
All the technical details are \*Based on 6500K CCT

**Available Wattage: 6W, 12W, 18W, 24W**

**Available Colours: CW, WW, NW**

### Applications:



LITESUN IS A REGISTERED TRADEMARK

23

*★ New! ★*



High quality PC based housing with PC diffuser

# TRIMLESS SURFACE PANEL

## Technical Specifications:

| Model No.     | ANRTS(R/S)-6W                                  |         | ANRTS(R/S)-12W |          | ANRTS(R/S)-18W |          |
|---------------|------------------------------------------------|---------|----------------|----------|----------------|----------|
| Wattage       | 6W                                             |         | 12W            |          | 18W            |          |
| Size          | ø92                                            | S/92 mm | ø120           | S/120 mm | ø227           | S/227 mm |
| Cutting size  | ø73                                            | S/73 mm | ø95            | S/95 mm  | ø203           | S/203 mm |
| Input Voltage | 100-275V/50-60HZ                               |         |                |          |                |          |
| CRI           | >80                                            |         |                |          |                |          |
| Body Type     | High quality PC based housing with PC diffuser |         |                |          |                |          |
| Colour Temp.  | CW/WW/NW                                       |         |                |          |                |          |
| Lumen (lm)    | 600 lm                                         |         | 1200 lm        |          | 1800 lm        |          |
| Mounting      | Surface                                        |         |                |          |                |          |

\*O1  
All the technical details are \*Based on 6500K CCT

**Available Wattage: 6W, 12W, 18W**

**Available Colours: CW, WW, NW**

Applications:



Mall



Office



Showroom  
etc.

LITESUN IS A REGISTERED TRADEMARK

24

## WONDER BACKLIT PANEL



### Technical Specifications:

| Model No.     | ANRW(S/R)-8W                                   |          | ANRW(S/R)-15W |          | ANRW(S/R)-22W |          |
|---------------|------------------------------------------------|----------|---------------|----------|---------------|----------|
| Wattage       | 8W                                             |          | 15W           |          | 22W           |          |
| Size          | Ø114                                           | S/114 mm | Ø114          | S/114 mm | Ø120          | S/120 mm |
| Cutting size  | Ø101                                           | S/101 mm | Ø101          | S/101 mm | Ø95           | S/95 mm  |
| Input Voltage | 100-275V/50-60HZ                               |          |               |          |               |          |
| CRI           | >80                                            |          |               |          |               |          |
| Body Type     | High quality PC based housing with PC diffuser |          |               |          |               |          |
| Colour Temp.  | CW/WW/NW                                       |          |               |          |               |          |
| Lumen (lm)    | 800 lm                                         |          | 1500 lm       |          | 2200 lm       |          |

\*O1  
All the technical details are \*Based on 6500K CCT

**Available Wattage : 8W, 15W, 22W**

**Available Colours: CW, WW, NW**

Applications:



Mall



Office



Showroom  
etc.

LITESUN IS A REGISTERED TRADEMARK

25



## 1X1 ALUMINIUM SLIM PANEL

### Technical Specifications:

| Model No.     | ANRPLS-24W                            |
|---------------|---------------------------------------|
| Wattage       | 24W                                   |
| Size          | 295 mm                                |
| Cutting size  | 286 mm                                |
| Input Voltage | 100-275V/50-60HZ                      |
| CRI           | >80                                   |
| Body Type     | High quality PC & metal based housing |
| Colour Temp.  | CW/WW/NW                              |
| Lumen (lm)    | 2400 lm                               |
| Beam Angle    | 180°                                  |

\*O1  
All the technical details are \*Based on 6500K CCT

**Available Wattage : 24W**

**Available Colours: CW, WW, NW**

Applications:



Mall



Office



Showroom  
etc.

LITESUN IS A REGISTERED TRADEMARK

26

## 2X2 BACKLIT PANEL SURFACE PANEL



### Technical Specifications:

| Model No.     | ANRPL-40W                             | ANRPLS-40W                            |
|---------------|---------------------------------------|---------------------------------------|
| Wattage       | 40W                                   | 40W                                   |
| Size          | 595 mm                                | 595 mm                                |
| Cutting size  | 584 mm                                | 584 mm                                |
| Input Voltage | 100-275V/50-60HZ                      | 100-275V/50-60HZ                      |
| CRI           | >80                                   | >80                                   |
| Body Type     | High quality PC & metal based housing | High quality PC & metal based housing |
| Colour Temp.  | CW/WW/NW                              | CW/WW/NW                              |
| Lumen (lm)    | 4000 lm                               | 4000 lm                               |
| Beam Angle    | 180°                                  | 180°                                  |
| Mounting      | Concealed                             | Surface                               |

\*O1  
All the technical details are \*Based on 6500K CCT

**Available Wattage : 40W**

**Available Colours: CW, WW, NW**

Applications:



Mall



Office



Showroom  
etc.

LITESUN IS A REGISTERED TRADEMARK

27



# LINEAR LIGHT

## Technical Specifications:

| Model         | ANRLL-1 EYE                                   | ANRLL-2 EYE | ANRLL-5 EYE |
|---------------|-----------------------------------------------|-------------|-------------|
| Wattage       | 2W                                            | 4W          | 10W         |
| Size (LxW)    | –                                             | –           | 149x44 mm   |
| Cutting size  | –                                             | –           | 142 mm      |
| Body Colour   | Black, White                                  |             |             |
| Input voltage | 100-275V/50-60HZ                              |             |             |
| CRI           | >80                                           |             |             |
| Body Type     | High quality die cast aluminium based housing |             |             |
| Colour temp.  | WW                                            |             |             |
| Lumen (lm)    | 200 lm                                        | 400 lm      | 1000 lm     |

\*O1  
All the technical details are \*Based on 6500K CCT

**Available Wattage: 2W, 4W, 10W**

**Available Colours: WW**

**Body Colours: BLACK, WHITE**

## Applications:



4 FEET

# PROFILE LIGHT

## Technical Specifications:

|               |                                               |
|---------------|-----------------------------------------------|
| Model         | ANRHPL-40W                                    |
| Wattage       | 40W                                           |
| Length        | 1220 mm                                       |
| Input voltage | 100-275V/50-60HZ                              |
| CRI           | >80                                           |
| Body Type     | High quality die cast aluminium based housing |
| Colour temp.  | CW/WW/NW                                      |
| Lumen (lm)    | 4000 lm                                       |
| Mounting      | Surface/Suspended                             |

\*O1  
All the technical details are \*Based on 6500K CCT

**Available Wattage: 40W**

**Available Colours: CW, WW, NW**

## Applications:



Office



Showroom

LITESUN IS A REGISTERED TRADEMARK

29

*★ New! ★*



*Glory*  
**DOWNLIGHT**

**FITS IN ALL CONCEALED BOXES**

**Technical Specifications:**

| Model No.     | ANRGD-7W                                                                             |
|---------------|--------------------------------------------------------------------------------------|
| Wattage       | 7W                                                                                   |
| Size          | 104 mm                                                                               |
| Cutting size  | Ø80                                                                                  |
| Input voltage | 100-275V/50-60HZ                                                                     |
| CRI           | >80                                                                                  |
| Body Type     | High quality PC based housing                                                        |
| Colour temp.  | CW/WW/NW                                                                             |
| Body Colours  | White+Rose Gold, White+Black, White+White, Black+Rose Gold, Black+Black, Black+White |
| Lumen (lm)    | 700 lm                                                                               |

\*O1  
All the technical details are \*Based on 6500K CCT

**Available Wattage : 7W**

**Available Colours: CW, WW, NW**

**Applications:**



Drawing Room



Kitchen



Bathroom



Office



Showroom etc.

LITESUN IS A REGISTERED TRADEMARK

30



# MOON

## COB LIGHT



WHOLE WHITE

SATIN NICKLE +  
WHITE

ROSE GOLD +  
WHITE

GOLD +  
WHITE

SHINY BLACK +  
BLACK

SATIN NICKLE +  
BLACK

ROSE GOLD +  
BLACK

GOLD +  
BLACK

### Technical Specifications:

| Model No.     | ANRMCL-6W                                     | ANRMCL-12W | ANRMCL-18W |
|---------------|-----------------------------------------------|------------|------------|
| Wattage       | 6W                                            | 12W        | 18W        |
| Size          | 63x63 mm                                      | 85x85 mm   | 90x90 mm   |
| Cutting size  | 60x60 mm                                      | 80x80 mm   | 93x93 mm   |
| Input Voltage | 100-275V/50-60HZ                              |            |            |
| CRI           | >80                                           |            |            |
| Body Type     | High quality die cast aluminium based housing |            |            |
| Colour Temp.  | CW/WW/NW                                      |            |            |
| Lumen (lm)    | 600 lm                                        | 1200 lm    | 1800 lm    |

\*O1  
All the technical details are \*Based on 6500K CCT

**Available Wattage : 6W, 12W, 18W**

**Available Colours: CW, WW, NW**

### Applications:



Drawing  
Room



Kitchen



Bathroom



Office



Showroom  
etc.

LITESUN IS A REGISTERED TRADEMARK

31



## COB MOVABLE


### Technical Specifications:

| Model No.     | ANRCM-6W                                       | ANRCM-12W | ANRCM-18W | ANRCM-30W | ANRCM-50W |
|---------------|------------------------------------------------|-----------|-----------|-----------|-----------|
| Wattage       | 6W                                             | 12W       | 18W       | 30W       | 50W       |
| Size          |                                                |           |           |           |           |
| Cutting size  |                                                |           |           |           |           |
| Input Voltage | 100-275V/50-60HZ                               |           |           |           |           |
| CRI           | >80                                            |           |           |           |           |
| Body Type     | High quality PC based housing with PC diffuser |           |           |           |           |
| Colour Temp.  | CW/WW/NW                                       |           |           |           |           |
| Lumen (lm)    | 600 lm                                         | 1200 lm   | 1800 lm   | 3000 lm   | 5000 lm   |

**Available Wattage : 6W, 12W, 18W, 30W & 50W**

**Available Colours: CW, WW, NW**

### Applications:



\*O1  
All the technical details are \*Based on 6500K CCT



## DEEP DOWNLIGHT

### Technical Specifications:

| Model No.    | ANRDD-12W | ANRDD-18W |
|--------------|-----------|-----------|
| Wattage      | 12W       | 18W       |
| Size         | 119 mm    | 149 mm    |
| Cutting size | Ø98       | Ø127      |
| Colour Temp. | CW/WW     | CW/WW     |
| Lumen (lm)   | 1200 lm   | 1800 lm   |

\*O1

**Available Wattage : 12W, 18W,**

**Available Colours: CW, WW**

### Applications:



Drawing Room



Kitchen



Bathroom



Office



Showroom etc.



# TRACK LIGHT

## Technical Specifications:


| Model No.    | ANRTL/WTL-10W               | ANRTL/WTL-20W | ANRTL/WTL-30W | ANRTL/WTL-40W |
|--------------|-----------------------------|---------------|---------------|---------------|
| Wattage      | 10W                         | 20W           | 30W           | 40W           |
| Colour Temp. | CW/WW/NW                    |               |               |               |
| Lumen (lm)   | 1000 lm                     | 2000 lm       | 3000 lm       | 4000 lm       |
| Mounting     | Wall track/Surface Mounting |               |               |               |

\*O1

**Available Wattage : 10W, 20W, 30W, 40W**

**Available Colours: CW, WW, NW**

Applications:

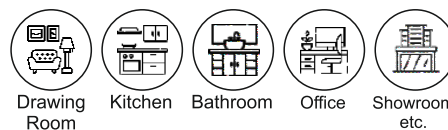



## COB CYLINDER

### Technical Specifications:

| Model No.    | ANRCC-6W                       | ANRCC-12W | ANRCC-18W |
|--------------|--------------------------------|-----------|-----------|
| Wattage      | 6W                             | 12W       | 18W       |
| Colour Temp. | CW/WW/NW                       |           |           |
| Lumen (lm)   | 600 lm                         | 1200 lm   | 1800 lm   |
| REF Colour   | Rose Gold, Silver, Shiny Black |           |           |
| Mounting     | Surface Mounting               |           |           |

\*O1

**Available Wattage : 6W,12W,18W**

**Available Colours: CW, WW, NW**

Applications:



Drawing Room



Kitchen



Bathroom



Office



Showroom etc.

LITESUN IS A REGISTERED TRADEMARK

35

★ *New!* ★



# STREET LIGHT


## Technical Specifications:

|               |                                                                         |
|---------------|-------------------------------------------------------------------------|
| Model No.     | ANRST-24W                                                               |
| Wattage       | 24W                                                                     |
| Input Voltage | 100-275V/50-60HZ                                                        |
| CRI           | >80                                                                     |
| Protection    | IP-65 water resistant                                                   |
| Body Type     | High quality die-cast aluminium housing+thoughened heat resistant glass |
| Colour Temp.  | CW/WW                                                                   |
| Lumen (lm)    | 2400 lm                                                                 |

**Available Wattage : 24W**

**Available Colours: CW, WW**

Applications:

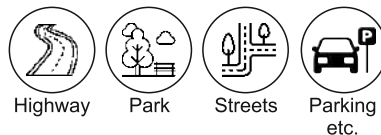

**IP-65**

LITESUN IS A REGISTERED TRADEMARK

36

\*O2

All the technical details are \*Based on 6500K CCT

*★ New! ★*

# SENSOR STREET LIGHT




## Technical Specifications:

| Model No.     | ANRSST-50W                                                             |
|---------------|------------------------------------------------------------------------|
| Wattage       | 50W                                                                    |
| Input Voltage | 100-275V/50-60HZ                                                       |
| CRI           | >80                                                                    |
| Protection    | IP-66 water resistant                                                  |
| Body Type     | High quality die-cast aluminium housing+thougened heat resistant glass |
| Colour Temp.  | CW/WW                                                                  |
| Lumen (lm)    | 15000 lm                                                               |

**Available Wattage : 50W**

**Available Colours: CW, WW**

Applications:

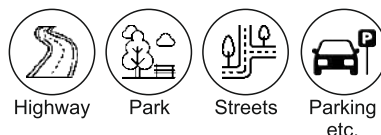

**IP-66**

LITESUN IS A REGISTERED TRADEMARK

37

\*O2

All the technical details are \*Based on 6500K CCT



## POLY CARBONATE PC STREET LIGHT

### Technical Specifications:

|               |                                     |
|---------------|-------------------------------------|
| Model No.     | ANRSTP-20W                          |
| Wattage       | 20W                                 |
| Input Voltage | 100-275V/50-60HZ                    |
| CRI           | >80                                 |
| Protection    | IP-65 water resistant               |
| Body Type     | High quality poly carbonate housing |
| Colour Temp.  | CW/WW                               |
| Lumen (lm)    | 2000 lm                             |

**Available Wattage : 20W**

**Available Colours: CW, WW**

Applications:



Highway



Park



Streets



Parking  
etc.

\*O2

All the technical details are \*Based on 6500K CCT



# IP-65

LITESUN IS A REGISTERED TRADEMARK

38



# ALUMINIUM STREET LIGHT

## Technical Specifications:

| Model No.     | ANRST-18W                                                              | ANRST-30W | ANRST-50W | ANRST-100W | ANRST-150W |
|---------------|------------------------------------------------------------------------|-----------|-----------|------------|------------|
| Wattage       | 18W                                                                    | 30W       | 50W       | 100W       | 150W       |
| Input Voltage | 100-275V/50-60HZ                                                       |           |           |            |            |
| CRI           | >80                                                                    |           |           |            |            |
| Protection    | IP-65 water resistant                                                  |           |           |            |            |
| Body Type     | High quality die-cast aluminium housing+thougened heat resistant glass |           |           |            |            |
| Colour Temp.  | CW/WW                                                                  |           |           |            |            |
| Lumen (lm)    | 1800 lm                                                                | 3000 lm   | 5000 lm   | 10000 lm   | 15000 lm   |


\*O2

All the technical details are \*Based on 6500K CCT

**Available Wattage : 18W,30W,50W,100W, 150W**

**Available Colours: CW, WW,**

## Applications:

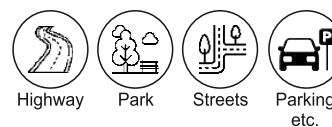

# IP-65

LITESUN IS A REGISTERED TRADEMARK

# INDUSTRIAL STREET LIGHT



## Technical Specifications:

| Model No.     | ANRST-150W                                                             | ANRST-250W |
|---------------|------------------------------------------------------------------------|------------|
| Wattage       | 150W                                                                   | 250W       |
| Input Voltage | 100-275V/50-60HZ                                                       |            |
| CRI           | >80                                                                    |            |
| Protection    | IP-66 water resistant                                                  |            |
| Body Type     | High quality die-cast aluminium housing+thougened heat resistant glass |            |
| Colour Temp.  | CW                                                                     |            |
| Lumen (lm)    | 15000 lm                                                               | 25000 lm   |

\*O2

All the technical details are \*Based on 6500K CCT

**Available Wattage: 150W, 250W**

**Available Colours: CW**

**Applications:**



Highway



Streets



Factories



Parks

# IP-66

LITESUN IS A REGISTERED TRADEMARK

40

*★ New! ★*



# FLOOD LIGHT PRIME SERIES

## Technical Specifications:

| Model No.     | ANRFLP-50W                              | ANRFLP-100W | ANRFLP-200W |
|---------------|-----------------------------------------|-------------|-------------|
| Wattage       | 50W                                     | 100W        | 200W        |
| Input voltage | 100-275V/50-60HZ                        |             |             |
| CRI           | >80                                     |             |             |
| Protection    | IP-66 water resistant                   |             |             |
| Body Type     | High quality die-cast aluminium housing |             |             |
| Colour temp.  | CW, WW                                  |             |             |
| Lumen (lm)    | 5000 lm                                 | 10000 lm    | 20000 lm    |

\*O2

All the technical details are \*Based on 6500K CCT

**Available Wattage: 50W, 100W, 200W**

**Available Colours: CW, WW**

## Applications:



Stadium



Palace



Factories



Parks



**IP-66**

LITESUN IS A REGISTERED TRADEMARK

✨
 New!
 ✨



# PC FLOOD LIGHT

## Technical Specifications:

|               |                                                |
|---------------|------------------------------------------------|
| Model No.     | ANRFLP-25W                                     |
| Wattage       | 25W                                            |
| Lense         | High finish Lense Quality for Extra Brightness |
| Input voltage | 100-275V/50-60HZ                               |
| CRI           | >80                                            |
| Protection    | IP-65 water resistant                          |
| Body Type     | High quality Poly carbonate housing            |
| Colour temp.  | CW, WW, RED, GREEN, BLUE, PINK                 |
| Lumen (lm)    | 2500 lm                                        |

\*O2  
 All the technical details are \*Based on 6500K CCT

Available Wattage: 25W

Available  
 Colours: CW, WW, REG, GREEN, BLUE, PINK

Applications:



Backyard



Stores



Roads



Parks

IP-65

LITESUN IS A REGISTERED TRADEMARK

*★ New! ★*



# FLOOD LIGHT E-SERIES

## Technical Specifications:

| Model No.     | ANRFLE-50W                                                             | ANRFLE-100W | ANRFLE-150W | ANRFLE-200W | ANRFLE-300W | ANRFLE-400W |
|---------------|------------------------------------------------------------------------|-------------|-------------|-------------|-------------|-------------|
| Wattage       | 50W                                                                    | 100W        | 150W        | 200W        | 300W        | 400W        |
| Input Voltage | 100-275V/50-60HZ                                                       |             |             |             |             |             |
| CRI           | >80                                                                    |             |             |             |             |             |
| Protection    | IP-65 water resistant                                                  |             |             |             |             |             |
| Body Type     | High quality die-cast aluminium housing+thougened heat resistant glass |             |             |             |             |             |
| Colour Temp.  | CW/WW                                                                  |             |             |             |             |             |
| Lumen (lm)    | 5000 lm                                                                | 10000 lm    | 15000 lm    | 20000 lm    | 30000 lm    | 40000 lm    |

\*O2

All the technical details are \*Based on 6500K CCT

**Available Wattage:**  
50W, 100W, 150W, 200W, 300W, 400W

**Available Colour:**  
CW, WW

**Applications:**



Stadium



Palace



Factories

# IP-66

LITESUN IS A REGISTERED TRADEMARK

43



# FLOOD LIGHT R-SERIES

## Technical Specifications:

| Model No.     | ANRFL-10W                                                              | ANRFL-20W | ANRFL-30W | ANRFL-50W | ANRFL-100W | ANRFL-150W | ANRFL-200W | ANRFL-250W |
|---------------|------------------------------------------------------------------------|-----------|-----------|-----------|------------|------------|------------|------------|
| Wattage       | 10W                                                                    | 20W       | 30W       | 50W       | 100W       | 150W       | 200W       | 250W       |
| Input Voltage | 100-275V/50-60HZ                                                       |           |           |           |            |            |            |            |
| CRI           | >80                                                                    |           |           |           |            |            |            |            |
| Protection    | IP-65 water resistant                                                  |           |           |           |            |            |            |            |
| Body Type     | High quality die-cast aluminium housing+thougened heat resistant glass |           |           |           |            |            |            |            |
| Colour Temp.  | CW/WW/RED/GREEN/BLUE/PURPLE                                            |           |           |           |            |            |            |            |
| Lumen (lm)    | 1000 lm                                                                | 2000 lm   | 3000 lm   | 5000 lm   | 10000 lm   | 15000 lm   | 20000 lm   | 25000 lm   |

\*O2

All the technical details are \*Based on 6500K CCT

**Available Wattage:**  
10W, 20W, 30W, 50W, 100W, 150W, 200W, 250W

**Available Colour:**  
CW, WW, RED, GREEN, BLUE, PURPLE

## Applications:



Stadium



Palace



Factories

# IP-65

LITESUN IS A REGISTERED TRADEMARK

44

# FLOOD LIGHT NEO SERIES



## Technical Specifications:

| Model No.     | ANRFLN-60                                      | ANRFLN-120 | ANRFLN-240 |
|---------------|------------------------------------------------|------------|------------|
| Wattage       | 60W                                            | 120W       | 240W       |
| Lense         | High finish Lense Quality for Extra Brightness |            |            |
| Input voltage | 100-275V/50-60HZ                               |            |            |
| CRI           | >80                                            |            |            |
| Protection    | IP-66 water resistant                          |            |            |
| Body Type     | High quality die-cast aluminium housing        |            |            |
| Colour temp.  | CW,WW                                          |            |            |
| Lumen (lm)    | 6000 lm                                        | 12000 lm   | 24000 lm   |

\*O2

All the technical details are \*Based on 6500K CCT

**Available Wattage: 60W, 120W, 240W**

**Available Colours: CW, WW**

## Applications:



Stadium



Palace



Factories



Parks

# IP-66

LITESUN IS A REGISTERED TRADEMARK

45

★ *New!* ★



# FLOOD LIGHT I-SERIES

## Technical Specifications:


| Model No.     | ANRFL-300W                                                             | ANRFL-400W | ANRFL-500W |
|---------------|------------------------------------------------------------------------|------------|------------|
| Wattage       | 300W                                                                   | 400W       | 500W       |
| Input voltage | 100-275V/50-60HZ                                                       |            |            |
| CRI           | >80                                                                    |            |            |
| Protection    | IP-66 water resistant                                                  |            |            |
| Body Type     | High quality die-cast aluminium+thougened heat resistant glass housing |            |            |
| Colour temp.  | CW,WW                                                                  |            |            |
| Lumen (lm)    | 30000 lm                                                               | 40000 lm   | 50000 lm   |

\*O2  
All the technical details are \*Based on 6500K CCT

**Available Wattage: 300W, 400W, 500W**

**Available Colours: CW, WW**

## Applications:

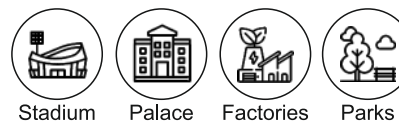

Stadium

Palace

Factories

Parks

# IP-66

LITESUN IS A REGISTERED TRADEMARK



lm

# LED HIGHBAY LIGHT

## Technical Specifications:

| Model No.    | ANRHB-50W | ANRHB-100W | ANRHB-150W |
|--------------|-----------|------------|------------|
| Wattage      | 50W       | 100W       | 150W       |
| Size         |           | 260 mm     | 160 mm     |
| Cutting size |           | ø152       | ø152       |
| Colour Temp. | CW        | CW         | CW         |
| Lumen (lm)   | 5000 lm   | 10000 lm   | 15000 lm   |

\*O2

**Available Wattage : 50W, 100W, 150W**

**Available Colours: CW**

Applications:



Factory



GYM



Warehouse

LITESUN IS A REGISTERED TRADEMARK

47

*★ New! ★*



# TIRANGA ROPE LIGHT

## Technical Specifications:


|                  |                 |
|------------------|-----------------|
| Model No.        | ANRTRL-120      |
| Wattage per mtr. | 10W             |
| LED              | 2835            |
| Lenght           | 18 Mtr.         |
| No. of LED       | 120 LED per mtr |
| Colour           | Tricolour       |

\*O1

## Available Colour: Tricolour

### Applications:



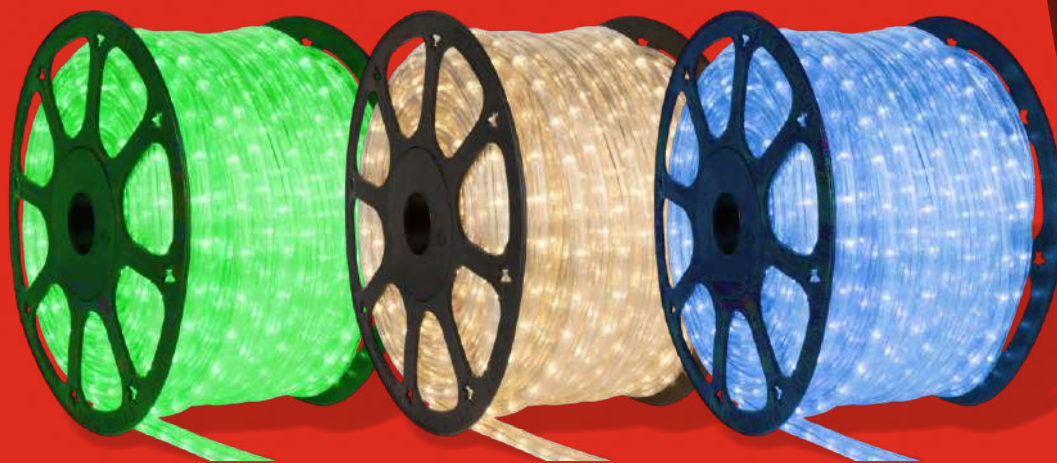

## ROPE LIGHT STANDARD

### Technical Specifications:

|                  |                                               |
|------------------|-----------------------------------------------|
| Model No.        | ANRRL-120                                     |
| Wattage per mtr. | 9W                                            |
| LED              | 2835                                          |
| Lenght           | 45 Mtr.                                       |
| No. of LED       | 120 LED per mtr                               |
| Colour           | CW/WW/NW/R/G/B/PINK/AMBER/ICE BLUE/MULTICOLOR |
| Warranty         | 1 year                                        |

\*O1

**Available Colour: CW, WW, NW, RED, GREEN, BLUE, PINK, AMBER, ICE BLUE, MULTICOLOR**

### Applications:



Park



Staircase



Trees



Ceiling



Home  
Decoration



Showroom  
etc.





## ROPE LIGHT PREMIUM

### Technical Specifications:

|                  |                                               |
|------------------|-----------------------------------------------|
| Model No.        | ANRRL-120                                     |
| Wattage per mtr. | 10W                                           |
| LED              | 2835                                          |
| Lenght           | 50 Meter                                      |
| No. of LED       | 120 LED per meter                             |
| Colour           | CW/WW/NW/R/G/B/PINK/AMBER/ICE BLUE/MULTICOLOR |
| Warranty         | 2 year                                        |

\*01

**Available Colour: CW, WW, NW, RED, GREEN, BLUE, PINK, AMBER, ICE BLUE, MULTICOLOR**

### Applications:





# ROPE LIGHT ADAPTOR

## Technical Specifications:

| Model No.     | ANRRLA-2Amp      | ANRRLA-4Amp |
|---------------|------------------|-------------|
| Current       | 2Amp             | 4Amp        |
| Wattage       | 24W              | 48W         |
| Input Voltage | 100-275V/50-60HZ |             |
| Output        | 12V/2Amp         | 12V/4Amp    |

\*O3

**Available in: 2Amp, 4Amp**

*★ New! ★*



## STRIP LIGHT SPARKLE

### Technical Specifications:

|                  |                                    |
|------------------|------------------------------------|
| Model No.        | ANRSSL-240                         |
| Wattage per mtr. | 40W                                |
| LED              | 2835                               |
| Lenght           | 5 Mtr.                             |
| No. of LED       | 240 LED per meter                  |
| Colour           | CW/WW/NW/R/G/B/PINK/AMBER/ICE BLUE |
| Warranty         | 1 year                             |

\*01

**Available Colour: CW, WW, NW, RED, GREEN, BLUE, PINK, AMBER, ICE BLUE**

### Applications:



Staircase



Ceiling




Home  
Decoration



Showroom  
etc.



★ *New!* ★

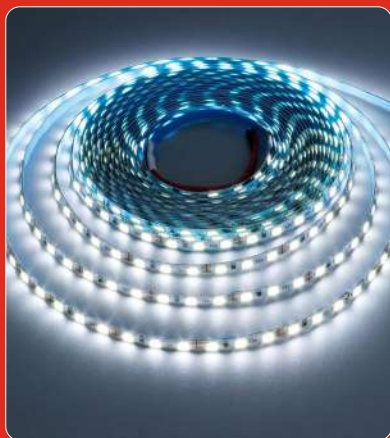

**Glitz**  
LED STRIP LIGHT

Technical Specifications:

|                  |                                    |
|------------------|------------------------------------|
| Model No.        | ANRSSL-240                         |
| Wattage per mtr. | 60W                                |
| LED              | 2835                               |
| Lenght           | 5 Mtr.                             |
| No. of LED       | 240 LED per meter                  |
| Colour           | CW/WW/NW/R/G/B/PINK/AMBER/ICE BLUE |
| Warranty         | 2 year                             |

\*01

**Available Colour: CW, WW, NW, RED, GREEN, BLUE, PINK, AMBER, ICE BLUE**

Applications:



Staircase



Ceiling



Home  
Decoration



Showroom  
etc.



LITESUN IS A REGISTERED TRADEMARK

53



  
**LED SMPS DRIVER**

Technical Specifications:

| Model No.     | ANRNSM-5A        | ANRNSM-10A |
|---------------|------------------|------------|
| Current       | 5Amp             | 10Amp      |
| Wattage       | 60W              | 120W       |
| Input Voltage | 100-275V/50-60HZ |            |
| Output        | 12V/5Amp         | 12V/10Amp  |

\*O3

**Available Amp : 5Amp, 10Amp**

★ *New!* ★



# WALL LAMP LIGHT

## Technical Specifications:

|               |                                         |
|---------------|-----------------------------------------|
| Model No.     | ANRWLL-3WAY                             |
| Wattage       | 5W                                      |
| Input Voltage | 100-275V/50-60HZ                        |
| Body Type     | High quality die cast aluminium housing |
| Colour        | WW                                      |
| Mounting      | Wall Mount                              |

## 3WAY

**Wattage Available: 5W**


**Available Colour: WW**

## Applications:



Walls

\*01

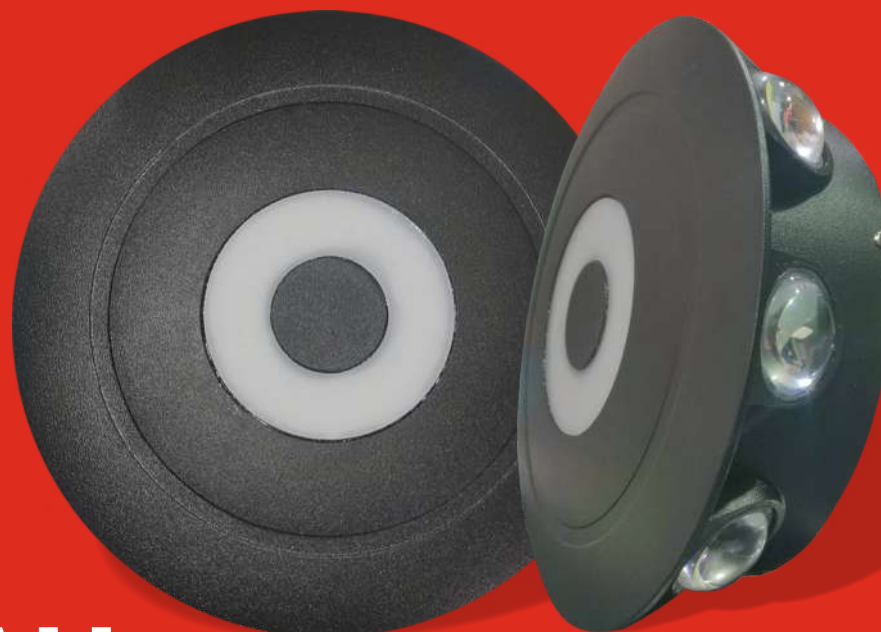

# STAR WALL LIGHT

## Technical Specifications:

| Model No.     | ANRSWL-4WAY                             | ANRSWL-6WAY | ANRSWL-8WAY |
|---------------|-----------------------------------------|-------------|-------------|
| Wattage       | 6W                                      | 9W          | 12W         |
| Input Voltage | 100-275V/50-60HZ                        |             |             |
| Body Type     | High quality die cast aluminium housing |             |             |
| Colour Temp.  | WW                                      |             |             |
| Mounting      | Wall Mount                              |             |             |

\*O1

**4WAY, 6WAY, 8WAY**  
**Wattage Available: 6W, 9W, 12W**  
**Available Colour: WW**

Applications:




Walls

# IP-65

LITESUN IS A REGISTERED TRADEMARK

56

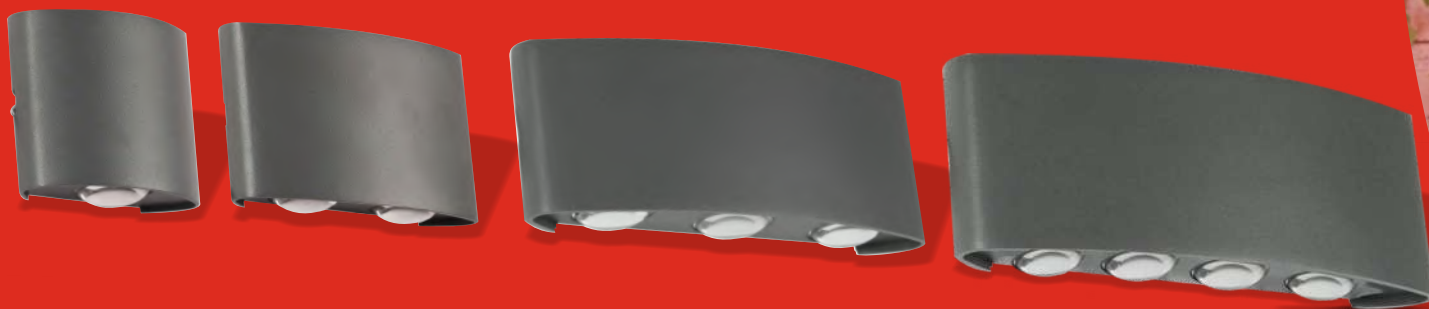

## OVER UP DOWN LIGHT



### Technical Specifications:

| Model No.     | ANROL-2WAY                              | ANROL-4WAY | ANROL-6WAY | ANROL-8WAY |
|---------------|-----------------------------------------|------------|------------|------------|
| Wattage       | 3W                                      | 6W         | 9W         | 12W        |
| Input Voltage | 100-275V/50-60HZ                        |            |            |            |
| Body Type     | High quality die cast aluminium housing |            |            |            |
| Colour Temp.  | ww                                      |            |            |            |
| Mounting      | Wall Mount                              |            |            |            |

\*01

**2WAY, 4WAY, 6WAY, 8WAY**  
**Wattage Available: 3W, 6W, 9W, 12W**  
**Available Colour: WW**

Applications:



Walls



# IP-65

LITESUN IS A REGISTERED TRADEMARK

57



## 2/4 WAY BALL WALL LIGHT

### Technical Specifications:

| Model No.     | ANR2W-2WAY                              | ANR4W-4WAY |
|---------------|-----------------------------------------|------------|
| Wattage       | 3W                                      | 6W         |
| Input Voltage | 100-275V/50-60HZ                        |            |
| Body Type     | High quality die cast aluminium housing |            |
| Colour Temp.  | WW                                      |            |
| Mounting      | Wall Mount                              |            |

\*O1

**2WAY, 4WAY**  
**Wattage Available: 3W, 6W**  
**Available Colour: WW**

Applications:



Walls

# IP-65

LITESUN IS A REGISTERED TRADEMARK

4+1



**Super Gold**

# POWER STRIP




**Bright Star**

## Technical Specifications:

| Model No. | ANRPSSG-2Y.      | ANRPSSG-4Y. | ANRPSBS-2Y. | ANRPSBS-4Y. |
|-----------|------------------|-------------|-------------|-------------|
| Yard      | 2 Yard           | 4 Yard      | 2 Yard      | 4 Yard      |
| Body Type | Metal Housing    |             | PVC Housing |             |
| Extension | 4+1              |             |             |             |
| Voltage   | 6 AMP. 240 VOLTS |             |             |             |

## Recommended for:

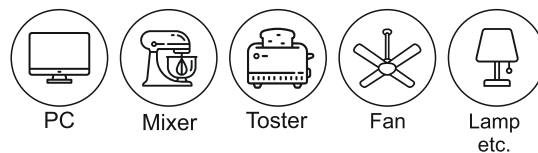

**WARNING: Not for Use with High-Wattage Devices.**



LITESUN IS A REGISTERED TRADEMARK



**HEAVY  
DUTY**



## MCB DISTRIBUTION BOX

*Classic*  
SERIES



COATED WITH  
**NEROLAC**  
PAINT

### Technical Specifications:

| Model No.     | ANRMCBC-4WAY | ANRMCBC-6WAY | ANRMCBC-8WAY | ANRMCBC-10WAY | ANRMCBC-12WAY | ANRMCBC-16WAY |
|---------------|--------------|--------------|--------------|---------------|---------------|---------------|
| No. of Ways   | 4 Way        | 6 Way        | 8 Way        | 10 Way        | 12 Way        | 16 Way        |
| Body type     | Metal        |              |              |               |               |               |
| Build Quality | Heavy Duty   |              |              |               |               |               |

\*03

LITESUN IS A REGISTERED TRADEMARK

60

## ELECTRICAL INSULATION TAPE FR-SELF ADHESIVE PVC



### Technical Specifications:

| Model No. | ANRET-7M. | ANRET-15M. |
|-----------|-----------|------------|
| Length    | 7 Metre   | 15 Metre   |
| Width     | 17mm      |            |

\*O3



★ *New!* ★

*Enjoy the Beat*



## BEAT-UP<sup>®</sup> SOUNDBAR

### Technical Specifications:

|                    |                |
|--------------------|----------------|
| Model No.          | ANRBSB-16W     |
| Output Power:      | 16W            |
| Bluetooth Version: | 5.0            |
| Battery Voltage:   | 2000mAh        |
| Material:          | ABS Body+Metal |

\*O3



RGB MUSIC  
SYNC



2000mAh  
BATTERY



16W  
POWER



WIRELESS  
V5.0



USB  
INPUT



AUX IN



FM  
RADIO



SD CARD  
SUPPORT

### Applications:



With  
LED TV



In house  
Party



Dance  
Classes



Travel





— Thank you —

Let's Build a Brighter & Sustainable Nation Together!

 **1800 843 0055 (Toll Free)**

(10:00 AM - 6:00 PM Monday to Saturday)

**E-mail:** [info@litesun.in](mailto:info@litesun.in)

**Website:** [www.litesun.in](http://www.litesun.in)

 [facebook.com/litesun.in](https://facebook.com/litesun.in)  [instagram/litesun.1](https://instagram.com/litesun.1)  [x.com/litesun1](https://x.com/litesun1)



[www.litesun.in](http://www.litesun.in)

A Quality Product By:

**A.N.R. Lighting Pvt. Ltd.**

1<sup>st</sup> Floor, Vishwas complex,  
Kishangarh Road, Shahabad (M)  
Dist. Kurukshetra, Haryana  
India 136135.